Price-list


Prices valid from 1st February 2023

All indicated prices are list prices and are valid for a delivery within 6 weeks after placement of the order. If delivery has to be made later than 6 weeks after placement of the order, the prices will be adjusted according to the then valid price-list. All prices are per item. Our terms of delivery are: EXW Bad Mergentheim (according to Incoterms 2010), packing for land transport included, excluding vat. The prices mentioned in this price-list do not include installation of the appliances or VAT.

Subject to changes in power, dimensions and construction.












PALUX Aktiengesellschaft Wilhelm-Frank-Straße 36 97980 Bad Mergentheim GERMANY

Tel.: +49 (0) 7931 55-0 Fax: +49 (0) 7931 55-88600 Internet: www.palux.de E-mail:info@palux.de



Contents		Page
Planning notes	from	3
Planning Tool	from	4
Worktop	from	5
Units	from	6
Accesories and Options	from	21
Heated Cabinets Standard	from	24
Cabinets Standard	from	28
Cabinets Hygiene H2	from	39
Scale drawings	from	52



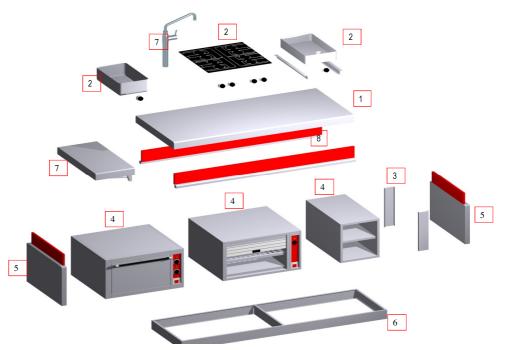

Planning Tool - Important Requirements

- The length of the work top (item 1) respectively the length of the range is the rusult of the summary of the dimensions of the elements (items 2) recommended (measures L1/L2/D) in the planning tool.
- The maximum length of a range is 5.200 mm because of manufacturing reasons. It is possible to weld together longer ranges on site.
- The operation panel below the work top is standardized executed as stainless steel panel (item 8). The operation panel can be lacquered in various RAL colors. A individual design of the side walls is possible. Contact us for your ideas, please.
- For the electrical installation base cabinet of 200, 300 or 400 mm length with space for 6, 10 or 14 connections must be included in the design
- The electric connection box as well as the other energy connections to be implemented in the installation base cabinet which should have access through the side panel or through a removable installation panel on the front side. Installation base cabinets of water, gas and electricity should be separated from each other (own base cabinet for each).
- Base cabinets (item 4) can be chosen from the "Standard" base cabinet, or the "Hygiene H2" base cabinet. A wide range of heated cabintes are also available.
- The induction generators can be installed either in the base cabinets (PALUX Generator base cabinets) or somewhere externally. It is not possible, to arrange Generator base cabinets crosswise, due to the cooling ventilation air flow. Standard length of the connection cable is 2.5 m. As option is an extended cable available to install the generators outside of the range (e. g. cellar). Maximum allowed distance from the Generator to the range is 4.0 m. Longer distances to be approved individually. External generators are not available for Induction Griddles.
- Below a Vario Pan, Steakgrill or under a Hot Plate an open base cabinet is necessary due to drainage system (Base for the planning are the measurement of the modules indicated in the Planning Tool)
- · Also for Deep Fat Fryers and Pasta Cookers special base cabinets with wing doors are required (item 3).
- Bain-Maries in base cabinets must equiped with a 150 mm operation panel in the base (item 3), which fit to the operation of the
- The side panels (item 5) are covering the base functions on the left and right hand side and to be calculated seperately.
- The length of a stainless steel plinth (item 6) has to be calculated per metre of length of the range.
- Accessories as for mixer support, mixing taps, sockets (item 7) are listed in the chapter options and accessories.

PALUX

Planning tool



PALUX Maître operable on both sides

example of calculation

				•	connection valu	ies Gas	
Constructi	o Pos.	Description	Item	code	kW	kW	List price in €
		Introduction	Р	M001			
Worktop	1	cover top 2.500 x 1.000 mm	VP73	31217			€
(273 mm)	1.01	Operation Panel In Customized RAL Colour (Black)		B_AL			€
	1.02	Delivery Cover Top And Bottom Seperately		17442			€
	2	Fry Star Built-In Single Pan Deep Fat Fryer Version AE	87	76796	8,00		€
	3	Hot Plate 800 4 Z	95	58840	14,00		€
	3.01	Switch For Each Gas Cooking Zone	VP6	17436			€
	3.02	Switch For Each Gas Cooking Zone	VP6	17436			€
	4	Vario Pan 400 1Z	97	75443	4,80		€
	5	Mixing Tape Kwc	VP6	17449			€
	6	Induction 4Z Half Covered	97	76601	24,00		€
	6.01	Switch For Each Gas Cooking Zone	VP6	17436			€
	6.02	Switch For Each Gas Cooking Zone	VP6	17436			€
base cabine	et 7	Side Panel 1000	VP6	17398			€
(510 mm)	8	Base Cabinet For Deep Fat Fryer 300 L for Fry Star AE	BZ40	00954			€
, ,	9	Base cabinet, pass-through 800-BB	BC40	04766			€
	10	Base cabinet, pass-through 800-BB	BC40	04766			€
	11	Base cabinet 400 with compartement for 2 induction generator	89	92815			€
	12	Front Panel Non Removable (100 mm)	VP6	17420			€
	13	Front panel, removable, for installations	VP6	17423			€
	14	Base cabinet 300 with terminal box for installations, for 10 connections	87	73829			€
	15	Side Panel 1000	VP6	17398			€
Plinth	16	CNS Plinth, Height 117 mm	VP6	17441			€
(117 mm)	17	Wooden frame (2,600 x 1,100 mm) for transport of base units	2,86 VP61	17411			€
	Option	Socket, 230 V 16 A, stainless steel colored plastic	VP6	17415			€
Total heigh	t 900 mm		Total		50,80	0,00	

Valid from 01.02.2023 4 PALUX

Worktop specification

Top surface 4mm (2+2). Welded reinforcemens profiles of 2mm. Work top with non-drip profile. On the long sides with a radius of 15 mm. Total height of the work top is 93.5mm. Under the work top are additional construction drop in of working units. The foldable operation panel is fixed at the work top by screws.

Depth	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	Depth
Length 900	VP731101	VP731201	VP731301	VP731401	VP731501	VP731601	VP731701		VP731901	VP731951	Length 900
	VP731102	VP731202	VP731302	VP731402	VP731502	VP731602	VP731702	VP731802	VP731902	VP731952	
1000	VP731103	VP731203	VP731303	VP731403	VP731503	VP731603	VP731703	VP731803	VP731903	VP731953	1000
1100	VP731104	VP731204	VP731304	VP731404	VP731504	VP731604	VP731704	VP731804	VP731904	VP731954	1100
1200	VP731105	VP731205	VP731305	VP731405	VP731505	VP731605	VP731705	VP731805	VP731905	VP731955	1200
1300	VP731106	VP731206	VP731306	VP731406	VP731506	VP731606	VP731706			VP731956	1300
1400	VP731107	VP731207	VP731307	VP731407	VP731507	VP731607	VP731707		VP731907	VP731957	1400
1500	VP731108	VP731208	VP731308	VP731408	VP731508	VP731608	VP731708		VP731908	VP731958	1500
1600	VP731109			VP731409	VP731509	VP731609					1600
1700	VP731110	VP731210		VP731410	VP731510	VP731610	VP731710				1700
1800	VP731111	VP731211	VP731311	VP731411	VP731511	VP731611	VP731711	VP731811	VP731911	VP731961	1800
1900	VP731112	VP731212	VP731312	VP731412	VP731512	VP731612	VP731712		VP731912	VP731962	1900
2000	VP731113	VP731213	VP731313	VP731413	VP731513	VP731613	VP731713			VP731963	2000
2100	VP731114	VP731214	VP731314	VP731414	VP731514	VP731614	VP731714	VP731814	VP731914	VP731964	2100
2200	VP731115	VP731215		VP731415	VP731515	VP731615	VP731715			VP731965	2200
2400	VP731116	VP731216	VP731316	VP731416	VP731516	VP731616	VP731716			VP731966	2400
2500	VP731117	VP731217	VP731317	VP731417	VP731517	VP731617	VP731717	VP731817	VP731917	VP731967	2500
2600	VP731118	VP731218	VP731318	VP731418	VP731518	VP731618	VP731718	VP731818	VP731918	VP731968	2600
2700	VP731119	VP731219	VP731319	VP731419	VP731519	VP731619	VP731719	VP731819	VP731919	VP731969	2700
2800	VP731120	VP731220	VP731320	VP731420	VP731520	VP731620	VP731720	VP731820	VP731920	VP731970	2800
2900	VP731121	VP731221	VP731321	VP731421	VP731521	VP731621	VP731721	VP731821	VP731921	VP731971	2900
3000	VP731122	VP731222	VP731322	VP731422	VP731522	VP731622	VP731722	VP731822	VP731922	VP731972	3000
3100	VP731123	VP731223	VP731323	VP731423	VP731523	VP731623	VP731723	VP731823	VP731923	VP731973	3100
3200	VP731124	VP731224	VP731324	VP731424	VP731524	VP731624	VP731724	VP731824	VP731924	VP731974	3200
3300	VP731125	VP731225	VP731325	VP731425	VP731525	VP731625	VP731725	VP731825	VP731925	VP731975	3300
3400	VP731126	VP731226	VP731326	VP731426	VP731526	VP731626	VP731726	VP731826	VP731926	VP731976	3400
3500	VP731127	VP731227	VP731327	VP731427	VP731527	VP731627	VP731727	VP731827	VP731927	VP731977	3 50 0
3600	VP731128	VP731228	VP731328	VP731428	VP731528	VP731628	VP731728	VP731828	VP731928	VP731978	3600
3700	VP731129	VP731229	VP731329	VP731429	VP731529	VP731629	VP731729	VP731829	VP731929	VP731979	3700
3800	VP731130	VP731230	VP731330	VP731430	VP731530	VP731630	VP731730	VP731830	VP731930	VP731980	3800
3900	VP731131	VP731231	VP731331	VP731431	VP731531	VP731631	VP731731	VP731831	VP731931	VP731981	3900
4000	VP731132	VP731232	VP731332	VP731432	VP731532	VP731632	VP731732	VP731832	VP731932	VP731982	4000
4100	VP731133	VP731233	VP731333	VP731433	VP731533	VP731633	VP731733	VP731833	VP731933	VP731983	4100
4200	VP731134	VP731234	VP731334	VP731434	VP731534	VP731634	VP731734	VP731834	VP731934	VP731984	4200
4300	VP731135	VP731235	VP731335	VP731435	VP731535	VP731635	VP731735	VP731835		VP731985	4300
4400	VP731136	VP731236	VP731336	VP731436	VP731536	VP731636	VP731736			VP731986	4400
4500	VP731137	VP731237	VP731337	VP731437	VP731537	VP731637	VP731737		VP731937	VP731987	4500
4600	VP731138	VP731238	VP731338	VP731438	VP731538	VP731638	VP731738			VP731988	4600
4700	VP731139					VP731639					4700
4800	VP731140			VP731440	VP731540	VP731640				VP731990	4800
		VP731241	VP731341	VP731441	VP731541	VP731641	VP731741	VP731841	VP731941	VP731991	4900
4900	VP731141										
490 0 500 0	VP731142	VP731242	VP731342	VP731442		VP731642				VP731992	5000
	VP731142 VP731143	VP731242 VP731243	VP731342 VP731343	VP731443	VP731543	VP731643	VP731743	VP731843	VP731943	VP731993	5000 5100
5000	VP731142	VP731242	VP731342					VP731843			

Valid from 01.02.2023 5





	Item code	Installation Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
		ELECTRIC				
	976083	Ceramic Range 2Z With Pan Recognition Energy saving, electronic pot recognition Ceramic hob: 375 x 650 mm 2 heating zones 4 kW each, dimension heating zone:300 x 300 mm each. Connected load: 400V 50/60Hz 3L+N+PE	533/475/775	8,0 kW	3 x 20 A	
	976954	Ceramic Range 2Z With Pan Recognition Energy saving, electronic pot recognition Ceramic hob: 375 x 720 mm 2 heating zones 4 kW each, dimension heating zone:300 x 300 mm each. Connected load: 400V 50/60Hz 3L+N+PE	533/475/845	8,0 kW	3 x 20 A	
	976962	crosswise Ceramic Range 2Z With Pan Recognition Transversely Energy saving, electronic pot recognition Ceramic hob: 720 x 375 mm 2 heating zones 4 kW each, dimension heating zone:300 x 300 mm each Connected load: 400V 50/60Hz 3L+N+PE	878/820/500	8,0 kW	3 x 20 A	
	977004	Ceramic Range 4Z With Pan Recognition Energy saving, electronic pot recognition Ceramic hob: 720 x 650 mm 4 heating zones with 4 kW/2 x 8 kW each, heating zone 300 x 300 mm each. Connected load: 400V 50/60Hz 3L+N+PE	878/820/775	16,0 kW	2x (3x20 A)	
	977020	Ceramic Range 4Z With Pan Recognition Energy saving, electronic pot recognition Ceramic hob: 720 x 720 mm 4 heating zones with 4 kW/2 x 8 kW each, heating zone 300 x 300 mm each. Connected load: 400V 50/60Hz 3L+N+PE	878/820/845	16,0 kW	2 x (3x20 A)	
		<u>Induction</u>				
=/	976350	Single Induction 1Z Ceramic hob: 360 x 360 mm 1 round coil with 5 kW, ø 270 mm Connected load: 400V 50/60Hz 3L+N+PE ind uding 1 inducton generator	518/460/485	5,0 kW	3 x 16 A	
=/	879708	Single Area Induction 1Z Ceramic hob: LxD 360 x 360 mm 1x 2 coils with 3,5 kW each, size of coils 260 x 135 mm Connected load: 400V 50/60Hz 3L+PE including 2 inducton generators	518/460/485	7,0 kW	3 x 16 A	

Valid from 01.02.2023 6 PALUX



Item code Installation Description Dimension Power Fuse Price L1 / L2 / D kW ELECTRIC 976393 2x Single Zone Induction Round Coil 518/460/856 10,0 kW 2 x Ceramic top with 360 x 360 mm each. 2 colls with 5,0 kW each, ø 270 mm Connected load: 400V 50/60Hz 3L+N+PE induding 2 induction generators 976407 2 x Single Zone Area Induction 518/460/485 14.0 kW 3 x 20 A 2 ceramic top with 360 x 360 mm each 2 x 2 coils with 3,5 kW each, size of coils 260 x 135 mm Connected load: 400V 50/60Hz 3L+N+PE induding 4 induction generators 976415 Induction 2Z 533/475/775 10,0 kW 3 x 16 A Ceramic hob: LxD 375 x 650 mm 2 coils with 5,0 kW each, ø 270 mm Connected load: 400V 50/60Hz 3L+N+PE induding 2 induction generators 976431 Induction 2Z 533/475/845 10,0 KW 3 x 16 A Ceramic hob: LxD 375 x 720 mm 2 coils with 5,0 kW each, ø 270 mm Connected load: 400V 50/60Hz 3L+N+PE induding 2 induction generators





Item code Installation Description Dimension Power Fuse Price L1 / L2 / D kW ELECTRIC 976474 crosswise Induction 2Z 878/820/500 10,0 kW 3 x 16 A Ceramic hob: LxD 720 x 375 mm 2 coils with 5,0 kW each, ø 270 mm Connected load: 400V 50/60Hz 3L+N+PE including 2 induction generators 976504 Area Induction 2Z 533/475/775 14,0 kW Ceramic hob: LxD 375 x 650 mm 2 cooking areas and 4 coils with 3,5 kW each, size of coils 260 x 135 mm Connected load: 400V 50/60Hz 3L+N+PE including 4 induction generators 976520 Area Induction 2Z Ceramic hob: LxD 375 x 720 mm 533/475/845 14,0 kW 3 x 20 A 2 cooking areas and 4 coils with 3,5 kW each, size of coils 290 x 150 mm Connected load: 400V 50/60Hz 3L+N+PE including 4 induction generators 976547 crosswise Area Induction Transversely 878/820/500 14,0 kW 3 x 20 A Ceramic hob: LxD 720 x 375 mm 2 cooking zones with 4 cols with 3,5 kW each, size of cols 290 x 150 mm Connected load: 400V 50/60Hz 3L+N+PE including 4 induction generators 882344 Induction 4Z 658/600/625 16,0 kW 3 x 32 A Ceramic hob: LxD 500x500 mm 4 coils, 4 kW each, ø 150 mm Connected load: 400V 50/60Hz 3L+N+PE induding 4 induction generators 976555 Induction 4Z 878/820/775 20,0 kW (3x32 A) Ceramic hob: LxD 720 x 650 mm 4 coils with 5,0 kW each / 1 x 20,0 kW, ø 270 mm Connected load: 400V 50/60Hz 3L+N+PE including 2 induction generators 976571 Induction 4Z 878/820/845 20,0 kW (3x32 A) Ceramic hob: LxD 720 x 720 mm 4 cals with 5,0 kW each / 1 x 20,0 kW, ø 270 mm

8

Connected load: 400V 50/60Hz 3L+N+PE including 4 induction generators





Item code Installation Description Dimension Fuse Price Power L1 / L2 / D kW ELECTRIC 878/820/845 1 x 10,0 kW 3 x 16 A 1 x 14,0 kW 3 x 20 A 976601 Induction 4Z Half area induction Ceramic hob: LxD 720 x 720 mm 2 colls with 5,0 kW each / 1 x 10,0 kW, ø 270 mm 2 zones with 2 coils with 3,5 kW each / 1 x 14 kW, size of coils 290 x 150 mm Connected load: 400V 50/60Hz 3L+N+PE including 6 induction generators Area Induction 4Z 878/820/775 2 x 14,0 kW 2 x (3x20 A) 976628 Ceramic hob: LxD 720 x 650 mm 4 zones with 2 coils with 3,5 kW each / 2 x 14 kW, size of coils 270 x 140 mm Connected load: $400V\,50/60Hz\,3L+N+PE$ induding 8 induction generators 976644 Area Induction 4Z 878/820/845 2 x 14,0 kW 2 x (3x20 A) Ceramic hob: LxD 720 x 720 mm 4 zones with 2 coils with 3,5 kW each / 2 x 14 kW, size of coils 290 x 150 mm Connected load: 400V 50/60Hz 3L+N+PE

9

including 8 induction generators





Item code Installation Description Dimension Price Power Fuse L1 / L2 / D kW ELECTRIC 976652 Induction Wok 1Z 498/440/465 3 x 16 A 5,0 kW Diameter ceramic wok 302 mm 1 cooking zone with 5,0 kW Accessories: 1 x wok pan, ø 360 mm Connected load: 400V 50/60Hz 3L+N+PE 692859 Wok-pan with handle D=360mm Base Cabinets For Generator 760 compartement for induction generator. 892814 Base Cabinet For Generator 200 GF2-U 76 200 760 L x D x H: 200 x 760 x 510 mm compartement for up to 4 induction generators Base Cabinet For Generator 400 L x D x H: 400 x 760 x 510 mm 892815 GF4-U 76 400 760 compartement for up to 8 induction generators Base Cabinet For Installations 760 CAUTION The installation compartments / sub-distributions must not be located directly on ovens, heating cabinets or other heat sources. 873799 Base Cabinet For Installations 200 200 x 510 mm pcs. terminal box for installations, for 6 connections 873829 Base Cabinet For Installations 300 300 x 510 mm terminal box for installations, for 10 connections 887439 Base Cabinet For Installations 400 400 x 510 mm pcs. terminal box for installations, for 14 connections

Only for special export countries





Item code	Installation	Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
		ELECTRIC				
976733		Heated Surface 1Z 1 heating zone 1,0 kW Stain'ess steel heated surface: LxD 375 x 650 mm Integrated into cover top Connected load: 400V 50/60Hz 2L+N+PE	533/475/775	1,0 kW	16 A	
976741	crosswise	Heated Surface 1Z 1 heating zone 1,0 kW Stainless steel heated surface: LxD 650 x 375 mm Integrated into cover top Connected load: 400V 50/60Hz 2L+N+PE	808/750/500	1,0 kW	16 A	
976768		Heated Surface 1Z 1 heating zone 1,0 kW Stainless steel heated surface: LxD 360 x 720 mm Integrated into cover top Connected load: 400V 50/60Hz 2L+N+PE	518/460/845	1,0 kW	16 A	
976776	crosswise	Heated Surface 1Z 1 heating zone 1,0 kW Stainless steel heated surface: LxD 720 x 360 mm Integrated into cover top Connected load: 400V 50/60Hz 2L+N+PE	878/820/485	1,0 kW	16 A	
976784		Heated Surface 2 2 heating zones 1,0 kW Stain'ess steel heated surface: LxD 650 x 650 mm Integrated into cover top Connected load: 400V 50/60Hz 2L+N+PE	808/750/775	2,0 kW	16 A	
976792		Heated Surface 2Z 2 heating zones 1,0 kW Stainless steel heated surface: LxD 720 x 720 mm Integrated into cover top Connected load: 400V 50/60Hz 2L+N+PE	878/820/845	2,0 kW	16 A	
974471		Hot Plate 600 2Z Seamless steel cooking/frying surface frying surface: LxD 347 x 617 mm with circumferential collecting channel with downwards drain in GN Container 2 heating zones with 3,5 kW each Accessories: 1 GN 1/3 – 100 mm container Connected load: 400V 50/60Hz 2L+N+PE	602/544/838	7,0 kW	2 x 16 A	
690503		Splash guard for Hot Plate 600 2 Zones				
975214	crosswise	Hot Plate 600 2Z Seamless steel cooking/frying surface frying surface: LxD 617 x 347 mm with circumferential collecting channel with downwards drain in GN Container 2 heating zones with 3,5 kW each Accessories: 1 GN 1/3 – 100 mm container Connected load: 400V 50/60Hz 2L+N+PE	872/814/568	7,0 kW	2 x 16 A	
884378	crosswise	Splash guard for Hot Plate 600 2 Zones				
958840		Hot Plate 800 4Z Seamless steel cooking/frying surface frying surface: LxD 651 x 617 mm with circumferential collecting channel with downwards drain in GN Container 4 heating zones with 3,5 kW each / 2 x 7,0 kW, Accessories: 1 GN 1/3 – 100 mm container Connected load: 400V 50/60Hz 2L+N+PE	906/848/838	14,0 kW	2x (2 x 16 A)	
690511		Splash guard for Hot Plate 800 4 Zones				

Valid from 01.02.2023 11 **PALUX**



Item code Installation Description Dimension Power Fuse Price L1 / L2 / D kW ELECTRIC 975443 Vario Pan 400 1Z 520/462/811 4,8 kW 3 x 16 A high gloss polished C NS cooking/frying area Special composition of top with vacuum soldered copper plate Dimension cooking/frying surface: 330 x 470 x 75 mm Diameter drain plug: 60 mm Pan content 13 litres 1 heating zone with 4,8 kW Range of temperature 95-250 °C Accessories: 1 GN 1/1 – 100 mm container with bow handles 1 perforated lid, 1 drain plug Connected load: 400V 3 N 50/60Hz 502685 Lid for Vario Pan 400 884792 Splash guard for Vario Pan 400 972770 Vario Pan 600 2Z 720/662/811 7,0 kW 3 x 16 A high gloss polished CNS cooking/frying area

Special composition of top with vacuum soldered copper plate Dimension of cooking/frying surface: 530 x 470 x 75mm Diameter drain plug: 60 mm Special composition of top with vacuum soldered copper plate Dimension of cooking/frying surface: 530 x 470 x 75mm Diameter drain plug: 60 mm Pan content 21 litre 2 heating zones with 3,5 kW each Range of temperature: 95 -250° C Accessories:
1 GN 1/1 – 100 mm container with bow handles
1 perforated lid GN 1/1,1 drainplug 1 perforated lid, 1 drain plug Connected load: 400V 3 N 50/60Hz 502693 Lid for Vario Pan 400 884802 Splash guard for Vario Pan 400 880234 Vario Pan 800 CC 3Z 872/814/817 10,5 kW high gloss polished CNS cooking/frying area special composition of top with vacuum-soldered copper core Pan dimension: 680 x 580 x 75 mm Diameter drain plug: 60 mm Pan content 29 litre 3 heating zones: each 3.5 kW Range of temperature: 95 - 250°C Accessories: 1 GN 1/1 - Container 100 mm deep, with curved handles 1 Perforated lid and 1 drain plug Connected load: 400V 3 N 50/60Hz 892563 Lid for Vario Pan 800 884812 Splash guard for Vario Pan 800 CC 872/814/817 10,5 kW 880235 Vario Pan 800 SC 3Z 3 x 16 A high gloss polished CNS cooking/frying area special composition of top with vacuum-soldered steel core Pan dimension: Diameter drain plug: 60 mm Pan content 29 litre 3 heating zones: each 3,5 kW Range of temperature: 95 - 250°C Accessories: 1 GN 1/1 - Container 100 mm deep, with curved handles 1 Perforated lid and 1 drain plug Connected load: 400V 3 N 50/60Hz 892563 Lid for Vario Pan 800



884812

Splash quard for Vario Pan 800 SC



Item code Installation Description Dimension Power Fuse Price L1 / L2 / D kW ELECTRIC Induction Pan 600 2Z high polished CNS cooking surface Special composition of top with vacuum soldered copper plate 719/661/766 2 x 4,0 kW 3 x 16A 879767 Dimension of cooking/frying surface: 530 x 470 x 75 mm Diameter drain plug: 60 mm Pan content 21 litre 2 heating zones with 4,0 kW each 2 rectang u ar coils, Size of coils: 205 x 418 mm Range of temperature: 80 -220°C Accessories: 1 GN 1/1 - 100 mm container with bow handles 1 perforated lid G N 1/1,1 drain plug Connected load: 400V / 3 / 50/60Hz 880803 Splash guard for Induction Pan 600 induding 2 induction generators 999999 Generator compartment for induction pan 600 2Z L x D x H: 300 x 760 x 510 mm GF3-U 76 300 760 on request CAUTION: Under a pan an open base cabinet is always to be intended for GN container. 882993 720/662/811 10,0 kW 3 x 16 A high polisched CNS cooking surface Special composition of top with vacuum soldered copper plate Dimension of cooking/frying surface: 530 x 470 x 150 mm Diameter drain plug: 60 mm Pan content 40 Liter 2 heating zones with 5,0 kW each Range of temerature: 95-250 °C indusive swiveling water intake for cold or hot water without outlet valve Accessories: 1 GN 1/1 - 200 mm container with bow handles 1 perforated lid GN 1/1, 1 drain plug Connected load: 2 x 400 V / 3 / 50/60 Hz Grill pan Steel cooking surface 883004 720/662/811 10,0 kW 3 x 16 A Dimension of cooking/frying surface: 530 x 465 mm Diameter drain plug: 60 mm 2 heating zones with 5,0 kW each

Range of temerature: 100 - 250 °C

1 GN 1/1 – 100 mm container with bow handles 1 perforated lid GN 1/1,1 drainplug Connected load: 2 x 400V 3 N 50/60 Hz 2L+N+PE

Accessories:

PALUX



	Item code	Installatio	n Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
			ELECTRIC				
3 /	879825		Steak Grill 400 with downwards drain, drop-in unit Grilling surface: LXD 290 x 410 mm GN-Supports in base cabi net included Connected load: 230V 50/60Hz 1L+N+PE Drop-in unit with revolving anti drip moulding	542/484/748	3,6 kW	16 A	
	879826		Steak Grill 600 with downwards drain, drop-in unit Grilling surface: LxD 490 x 410 mm GN-Supports in base cati net included Connected load: 400V 50/60Hz 2L+N+PE Drop-in unit with revolving anti drip moulding	7 42/68 4/7 48	5,0 kW	2 x 16 A	
	888580		Steak Grill 800 with downwards drain, drop-in unit Grilling surface: LXD 684 x 410 mm GN-Supports in base cabinet included Connected load: 400V 3N 50/60 Hz 3L+N+PE Drop-in unit with revolving antidrip moulding	942/884/748	8,3 kW	3 x 16 A	
	976679	>>	Bain-Marie Gn 1/1 1 Z "Standard" with built-in water tap and drain connection Pan dimension: 304 x 510 x 170 mm Accessories: 1 perforated foor shelf included Mixing tap	482/424/710 686/629/520 see page	1,8 kW	16 A	23
			Connected load: 230V 50/60Hz 1L+N+PE				
	976687		Bain-Marie Gn 1/1 1 Z "Manual" Pan dimension: 304 x 510 x 170 mm Accessories: 1 perforated foor shelf included for connection with water supply with built-in water tap and drain connection C onnected load: 230V 50/60Hz 1L+N+PE	482/424/710 686/629/520	1,8 kW	16 A	
	VP617450		Supervision for Bainmarie GN 1/1 for small GN-container				
	976695		Bain-Marie Gn 2/11Z "Standard" with built-in water tap and drain connection Pan dimension: 635 x 510 x 170 mm Accessories: 1 perforated foor shelf included	813/755/710	3,6 kW	16 A	
		>>	Mixing tap Connected load: 230V 50/60Hz 1L+N+PE	see page			23
	976709		Bain-Marie Gn 2/1 1Z "Manual" Pan dimension: 635 x 510 x 170 mm Accessories: 1 perforated foor shelf included for connection with water supply with built-in water tap and drain connection Connected load: 230V 50/60Hz 1L+N+PE	813/755/710	3,6 kW	16 A	
	VP617451		Supervision for Bain-Marie GN 2/1 for small GN-container				





	Item code	Installation	Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
			ELECTRIC				
	884649		Bain-Marie GN 1x 2/3 1Z "Standard" with built-in water tap and drain connection Pan dimension: 304 x 334 x 170 mm	482/424/534	1,8 kW	16 A	
			1 perforated floor shelf included Mixing tap Connected load: 230V 50/60Hz 1L+N+PE	see page			23
A	884652		Bain-Marie GN 4x 1/3 1Z "Standard" with built-in water tap and drain connection Pan dimension: 304 x 675 x 170 mm 1 perforated floor shelf included	482/424/884 865/807/520	1,8 kW in cros	16 A sswise	
			Mixing tap Connected load: 230V 50/60Hz 1L+N+PE	see page			23
A T	884653		Bain-Marie GN 4x 1/3 1Z "Manual" Pan dimension: 304 x 675 x 170 mm 1 perforated floor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50/60Hz 1L+N+PE	482/424/884 865/807/520	1,8 kW in cros	16 A sswise	
A	884654		Bain-Marie GN 5x 1/3 2Z "Standard" with built-in water tap and drain connection Pan dimension: 304 x 842 x 170 mm 1 perforated floor shelf included	482/424/1060 1041/983/520	3,6 kW in cros	16 A sswise	
		>>	Mixing tap Connected load: 230V 50/60Hz 1L+N+PE	see page			23
No.	884655		Bain-Marie GN 5x 1/3 2Z "Manual" Pan dimension: 304 x 842 x 170 mm 1 perforated foor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50/60Hz 1L+N+PE	482/424/1060 1041/983/520	3,6 kW in cros	16 A sswise	
	884656		Bain-Marie GN 6x 1/3 2Z "Standard" with built-in water tap and drain connection Pan dimension: 304 x 1009 x 170 mm 1 perforated floor shelf included Mixing tap	482/424/1236 1217/1159/520 see page	3,6 kW in cros	16 A sswise	23
	884657		Connected load: 230V 50/60Hz 1L+N+PE Bain-Marie GN 6x 1/3 2Z "Manual" Pan dimension: 304 x 1009 x 170 mm 1 perforated floor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50/60Hz 1L+N+PE	482/424/1236 1217/1159/520	3,6 kW	16 A	

Valid from 01.02.2023 15





Item code	Installation	Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
		ELECTRIC				
882741		Bain-Marie GN 5 x 1/6 1Z "Standard" with direct drain Pan dimension: 155 x 790 x 170/180 mm Accesories:	335/277/1035	1,4 kW	16 A	
	>>	1 perforated foor shelf included Mixing tap Connected load: 230V 50 /60 Hz 1L+N+PE	see page			23
882741*	crosswise	Bain-Marie GN 5 x 1/6 1Z "Standard" with direct drain Pan dimension: 155 x 790 x 170/180 mm Accesories:	970/912/400	1,4 kW	16 A	
	>>	1 perforated foor shelf included Mixing tap Connected load: 230V 50 /60 Hz 1L+N+PE	see page			23
882742		Bain-Marie GN 5 x 1/6 1Z "Manual" Pan dimension: 155 x 790 x 170/180 mm Accesories: 1 perforated floor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50 /60 Hz 1L+N+PE	335/277/1035	1,4 kW	16 A	
882742*	crosswise	Bain-Marie GN 5 x 1/6 1Z "Manual" Pan dimension: 155 x 790 x 170/180 mm Accesories: 1 perforated foor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50 /60 Hz 1L+N+PE	970/912/400	1,4 kW	16 A	
882743		Bain-Marie GN 6 x 1/6 1Z "Standard" with direct drain Pan dimension: 155 x 952 x 170/180 mm Accesories:	335/277/1197	1,4 kW	16 A	
	>>	1 perforated foor shelf included Mixing tap Connected load: 230V 50 /60 Hz 1L+N+PE	see page			23
882743*	crosswise	Bain-Marie GN 6 x 1/6 1Z "Standard" with direct drain Pan dimension: 155 x 952 x 170/180 mm Accesories: 1 perforated foor shelf included	1132/1074/400	1,4 kW	16 A	
	>>	Mixing tap Connected load: 230V 50 /60 Hz 1L+N+PE	see page			23
8827 44		Bain-Marie GN 6 x 1/6 1Z "Manual" Pan dimension: 155 x 952 x 170/180 mm Accesories: 1 perforated floor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50 /60 Hz 1L+N+PE	335/277/1197	1,4 kW	16 A	
882744*	crosswise	Bain-Marie GN 5 x 1/6 1Z "Manual" Pan dimension: 155 x 790 x 170/180 mm Accesories: 1 perforated floor shelf included for connection with water Device with manually adjustable water tap and drain connection Connected load: 230V 50 /60 Hz 1L+N+PE	1132/1074/400	1,4 kW	16 A	





 Item code	Installation	Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
		ELECTRIC				
959723	*	Vario Cooker GN 1/1 Pan content 35 litres Pan dimension: 308 x 509 x 240 mm Connected load: 400V 50/60Hz 3L+N+PE with swiveling flat tube heating element Downwards drain Without anti-drip moulding, seamlessly welded in	496/438/839	7,0 kW	3 x 16 A	
976814		Vario Cooker GN 1/1 With Water Supply Pan content 35 litres Pan dimension: 308 x 509 x 240 mm Connected load: 400V 50/60Hz 31.+N+PE with swiveling flat tube heating element Downwards drain Without anti-drip moulding, seamlessly welded in	496/438/839	7,0 kW	3 x 16 A	
976822	*	Vario Cooker G N 1/1 With Top-Mounted Electric Heater Pan content 35 litres Pan dimension: 308 x 509 x 240 mm Connected load: 400V 50/60Hz 31.+N+PE with swiveling flat tube heating element Downwards drain Without anti-drip moulding, seamlessly welded in	496/438/839	7,6 kW	3 x 16 A	
975095		Pasta Cooker GN 1/1 Pan content 35 litres with water supply and water dra nage none detachable in backside Accessories: 1 shelf, 1 overflow pipe, 1 drip tray and grate included Connected load: 400V 50/60Hz 3L+N+PE Seamlessly welded in without anti-drip moulding	519/461/839 746/688/579 (Transverse installation)	7,0 kW	3 x 16 A	
956457		Portion Single Basket With Handle 85 x 160 x 200/300 mm (max.6 pieces)				
977284	٠	Pasta Cooker GN 1/1 With 2 Automatic Basket Lifts Pan content: 35 litres with water supply and water drainage none detachable in backside with 2 basket lifts Accessories: 1 shelf, 1 overflow pipe, 1 drip tray and grate included and 2 Pasta baskets: 280x200x200 mm (953431) Connected load: 400V 50/60Hz 3L+N+PE Seamlessly welded without ant drip moulding	553/495/839 746/688/636 (Transverse installation)	7,0 kW	3 x 16 A	
953431		Pasta bas ket with handle 280 x 200 x 200/300 mm (max. 2 pieces)				
	*	Internal Audit to check the situation for installation at a depth <1000mm				
		Following base cabinets are compatible with the Pasta-Cooker:				
BC404920 BC404921 BC404922 BC404923 BC404924		Base cabinet with folding door 400 L- SFP4-U51-L-76-EB Base cabinet with folding door 400 R - SFP4-U51-R-76-EB Base cabinet with folding door 600 L - SFP6-U51-L-76-EB Base cabinet with folding door 600 R - SFP6-U51-R-76-EB Base cabinet with folding door 700 LR - SFP7-U51-LR-76-EB	see page see page see page see page see page			39 39 39 39
BZ404926 BZ404927 BZ404928 BZ404929 BZ404930		Hygiene base cabinet H2 with folding door $400 \text{ L} - \text{SFP4-U51-H2-L-76-EB}$ Hygiene base cabinet H2 with folding door $400 \text{ R} - \text{SFP4-U51-H2-R-76-EB}$ Hygiene base cabinet H2 with folding door $600 \text{ L} - \text{SFP6-U51-H2-L-76-EB}$ Hygiene base cabinet H2 with folding door $600 \text{ R} - \text{SFP6-U51-H2-R-76-EB}$ Hygiene base cabinet H2 with folding door $700 \text{ LR} - \text{SFP7-U51-H2-LR-76-EB}$	see page see page see page see page see page			49 49 49 49 49

Valid from 01.02.2023 17





	Item code	Installation Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
		ELECTRIC				
	956112	Single Pan Deep Fat Fryer, drop-in unit Useful capacity: 8,5 -11 litre Pan dimension: 220 x 340 x 190 mm Accessories: 1 basket 1 lild, 1 sieve Connected load: 400V 50/60Hz 3L+N+PE Drop-in unit with revolving anti drip mou	542/484/748	8,0 kW	3 x 16 A	
[ED]	959596	Dual Pan Deep Fat Fryer Useful capacity: 2 x 8,5 - 11 litre Pan dimension: 220 x 340 x 190 mm (2x) Accessories: 2 baskets, 2 lids, 2 seves included Connected load: 2 x 400V 50l60Hz 3L+N+PE Drop-in unit with revolving anti drip mouding	7 42/68 4/7 48	2 x 8,0 kW	2 x (3x16 A)	
	975117	Single Pan Deep Fat Fryer With Pump Useful capacity: 6,5 - 10 litre Pan dimension: 220 x 340 x 190 mm Accessories: 1 basket 1 lid, 1 sieve included Fat/oil filter system and pump in base cabinet Connected load: 400V 50/60Hz 3L+N+PE Drop-in unit with revolving anti drip moulding	542/484/748	8,0 kW	3 x 16 A	
	975125	Dual Pan Deep Fat Fryer With Pump Useful capacity: 2 x 6,5 - 10 litre Pan dimension: 220 x 340 x 190 mm (2x) Accessories: 2 baskets, 2 lids, 2 sieves included Fat/oil filter system and pump in base cabinet Connected load: 2 x 400V 50/60Hz 3L+N+PE Drop-in unit with revolving anti-drip moudding	7 42/68 4/7 48	2 x 8,0 kW	2 x (3x16 A)	
		Following base cabinets are compatible with the deep fat	fryer			
	BC404944 BC404945 BC404970 BC404971 BC404946 BC404947 BC404972	Base cabinet deep fat fryer 400 L - SFFP-U51-76-1B-L Base cabinet deep fat fryer 400 R - SFFP-U51-76-1B-R Base cabinet deep fat fryer 500 L - SFFP-U51-76-1B-L Base cabinet deep fat fryer 500 R - SFFP-U51-76-1B-R Base cabinet deep fat fryer 500 R - SFFP-U51-76-2B-L Base cabinet deep fat fryer 600 R - SFFP-U51-76-2B-R Base cabinet deep fat fryer 700 LR - SFFP-U51-76-2B-R	see page see page see page see page see page see page			38 38 38 38 38 38
	BZ404938 BZ404939 BZ404940 BZ404941	Base cabinet for deep fat fryer hygiene H2 400 L - SFFP-U51 Base cabinet for deep fat fryer hygiene H2 400 R - SFFP-U51 Base cabinet for deep fat fryer hygiene H2 600 L - SFFP-U51 Base cabinet for deep fat fryer hygiene H2 600 R - SFFP-U51	I-H2-76-1B-R see page -H2-76-2B-L see page			51 51 51 51
	→ Type AE	Fry Star Typ AE	3 42/28 4/735			
	→ Type BE	Fry Star Typ BE	442/384/735			
	→ Type CE	Fry Star Typ CE	5 42/48 4/735			
	→ Type DE	Fry Star Typ DE	542/484/735			

- Find more deep fat fryer in the Palux Fry Star price list Find more base cabinets "Standard" and base cabinets "Hygiene H2" for PALUX Fry Star on page 38 respectively page 50

PALUX

	Item code	Installation	Description	Dimension L1 / L2 / D	Power kW	Fuse A	Price €
			GAS				
	975516		2 Burner Gas Range Gas Moulding: 350 x 650 mm 2 burners 1 x 5,0 kW & 1 x 7,0 kW Safety ignition and pilot flame included Gas range designed for natural gas E 20 mbar Nozzle kit for liquid gas 50 mbar is included Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site	506/448/805	12,0 kW		
	976105	crosswise	2 Burner Gas Range, Transversely Gas Moulding: 650 x 350 mm 2 burners 1 x 5,0 kW & 1 x 7,0 kW Safety ignition and pilot fiame included Gas range designed for natural gas E 20 mbar Nozzle kit for liquid gas 50 mbar is included Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site	858/800/473	12,0 kW		
-12 11	975524		Gas Range 4Z 2 gas mouldings: 650 x 350 mm 4 burners 2 x 5,0 kW & 2 x 7,0 kW Safety ignition and pilot flame included Gas range designed for natural gas E 20 mbar Nozzle kit for liquid gas 50 mbar is included Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site	893/835/805	24,0 kW		
	882787		Gas Range 2Z Gas Moulding: 330 x 680 mm 2 Burners: in the front 10,0 kW + at the back 5,5 kW Safety ignition and pilot flame included Gas range designed for natural gas E 20 mbar Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site Not certified for the UK market!	522/464/822	15,5 kW		
	884262		Gas Range 4Z 2 gas mouldings: 330 x 680 mm 4 burners: front left 5,5 kW, front right 10,0 kW, right rear 5,5 kW, left rear 10,0 kW Safety ignition and pilot flame included Gas range designed for natural gas E 20 mbar Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site Not certified for the UK market!	918/860/822	31,0 kW		
	884074		Gas Hot Plate 2Z Steel cooking surface 25 mm elevated heating by 2 atmospheric burners located in front Dimension of cooking surface: 651 x 617 mm 2 heating zones with 5,0 kW each Range of temperature: 100°C bis ca. 450°C Gas range designed for natural gas E 20 mbar Nozzle kit for liquid gas 50 mbar is included Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site	802/744/803	12,0 kW		
	699187 699195 846805		Accessories Gas Nozzle kit for natural gas LL / for 2- burner Gas Range Nozzle kit for natural gas LL / for 4- burner Gas Range Nozzle kit for natural gas LL / for Vario Gas Pan				- - -





Item code Installation Description Dimension Fuse Power Price L1 / L2 / D kW Gas Vario Pan 600 2Z 883650 720/662/794 10,0 kW high gloss ploished CNS cooking/frying area Special composition of top with vacuum soldered copper plate Dimension of cooking/frying surface: 530 x 470 x 75 mm Diameter drain plug: 60 mm Pan content 21 litre 2 heating zones with 5,0 kW each Range of temperature: 100 - 250°C Accessories:
1 GN 1/1 - 100 mm container with bow handles
1 perforated lid GN 1/1, 1 drain plug Gas range designed for natural gas E 20 mbar Nozzle kit for liquid gas 50 mbar is included
Planning instructions: Gas valve of operation elements should be positioned closest to the gas connection on site 884083 Gas Lava Stone Grill Drop-in module Dimensions: 590 x 640 mm 742/684/720 10,3 kW Grid made of stainless steel rods Dimension of grilling surface: 425 x 480 mm 2 heating zones with 5,15 kW each Incl. Lavasteine Gas range designed for natural gas E 20 mbar Nozzle kit for liquid gas 50 mbar is included Drop-in unit with revolving anti drip mouding
Planning instructions: Gas valve of operation elements should be

positioned closest to the gas connection on site



Options and Accessories


ltem code	Description	Dimension	Unit	Price €
VP617418	Cut Out In Cover Top - for installation of external equipment (VP617419)		pcs.	
VP617419	Assembly Of Foreign Units In Cover Top		pcs.	
VP617426	Cut Out Work Top L For All Sizes - for floor mounted appliance		per Cooker	
VP617423	Front Panel Removable - for insta∥ations etc.		perm	
VP617420	Front Panel Non Removable - for insta∥ations etc.		per m	
VP617424	Extension Of Bespoke Work Top		p er m²	
VP617433	Foldable Work Top designed liked cover top (max. length 500 mm)		p er m²	
AEOFL	Preparation for connecting to energy optimization Note: Energy optimization for induction units onl	y on project-specific red	per app∥ance quest.	
VP617436	Shifting Switch to opposite side (for each Cooking Zon	ne)	per unit	
VP617417	Shifting Switch to opposite side (for each Cooking Zon	ne)	per unit	
B 371618	Cable Extension For Induction Coils 2 per cooking zone, up to length 4.000 mm		pcs.	
VP617397	Side Panel 900mm Depth		pcs.	
VP617398	Side Panel 1000 mm Depth		pcs.	
VP617399	Side Panel 1100 mm Depth		pcs.	
VP617400	Side Panel 1200 mm Depth		pcs.	
VP617401	Side Panel 1300 mm Depth		pcs.	
VP617402	Side Panel 1400 mm Depth		pcs.	
VP617403	Side Panel 1500 mm Depth		pcs.	
VP617404	Side Panel 1600 mm Depth		pcs.	
VP617405	Side Panel 1700 mm Depth		pcs.	
VP617406	Side Panel 1800 mm Depth		pcs.	
1H011946	Side Panel right for wall installation or transition to high substructures Length: 50 mm, Height: 548 mm		pcs.	
1H014422	Side Panel left for wall installation or transition to high substructures Length: 50 mm, Height: 548 mm		pcs.	





Options and Accessories

	ltem code	Description	Dimension	Unit	Price €
	VP617415	Socket 230 V 16 A, stainless steel colored plast	ic	pcs.	
EN EN	VP617438	Euro socket type CEE 400V 16A, stainless steel	colored plastic.	pcs.	
	VP617437	Euro socket type CEE 400V 32A, stainless steel	colored plastic.	pcs.	
	VP617422	Plug weld connection in front		perm	
	VP617446	Wall Connection CU 100 Backsplash in material thickness 2 mm, 100 mm hi 15 mm folded over completely	gh,	per m	
-	VP617441	Stainless Steel Plinth, 117 mm Height Price per metre up to a depth of 1.100 mm		perm	
	VP617441-12	Stainless Steel Plinth, 117 mm Height Price per metre from depth 1.200 mm up to 2.000 m	nm	perm	
	VP617411	Wooden frame for transport of base units		pro m²	
	VP617442	Delivery in parts (Work top and base cabinets s	eparatly)	per range	
	MDVSO12	Welding of the Maître cover sheet on site incl. preparing for a seam weld (Price without travel) till depth 1200 mm			
	MDVSO18	Welding of the Maître cover sheet on site incl. preparing for a seam weld (Price without travel) till depth 1800 mm			
	B_AL	Operation Panel laquered in customized RAL C RAL Colour according to costumer	olour	pcs.	
	882745	Wall mounted Mixing Tap "Echtermann" outreach: 300 mm for mounting to shelf Connection single faucet G 3/4	200	pcs.	
	VP617449	Mixing tap KWC height 650 mm outreach: 300 mm Drip stop Connection single faucet G 3/4	100	pcs.	
U	VP617448	Mixing tap KWC special height 490 mm outreach: 300 mm Drip stop Connection single faucet G 3/4	100	pcs.	



Options and Accessories

	Item code D	Description	Dimension	Unit	Price €
TT	EOBS-M	Board board dimensions (LxDxH): 1000 x 450 x 100 mm all sides folded down 90° bottom side closed excl. ceeling suspension or round columns of round pipe (Ø =102 mm) → Boards of >2500 mm require 3 ceeling suspensions or 3 columns of round pipe Total hight: 500 mm		per m	761,00
	ODBS50	Shelf for salamander board dimensions (LxDxH): 520 x 500 x 100 mm diameter of circular column 102 mm height 400 mm Total hight: 500 mm		pcs.	
	ODBS50-Q	Shelf for salamander - square column board dimensions (LxDxH): 520 x 500 x 100 mm square column with (LxDxH): 100 x 100 x 400 mm Total hight: 500 mm		pcs.	
	SMS1000	Column for one mixer bracket consists of: 1 x Mixing tap KWC special (Mixing tap special included VP6) 1 column 150 x 150 x 250 mm 1 mixer bracket, 1 cup holder 1x GN1/9 container for cupholder 1 hole for socket (Socket included 230 V, VP617415)	617448)	pcs.	
	SMS2000	Column for two mixer bracket consists of: 2 x Mixing tap KWC special (Mixing tap special included, VP 1x console 150x150x250mm / 740mm 2x cups for cupholder 2x GN1/9 container for cupholder 2x holes for socket (2 Sockets 230 V included, VP617415)	617448)	pcs.	
		Illustration: SMS2000	Legend: 1. Mixing faucet (Accessories/Options) 2. Console 3. Socket (Accessories/Options)		
	SMS3	Column for two mixer bracket consists of: 1x console 150 x 150 x 250mm 2x cups for cupholder 2x holes for socket (2 Sockets 230 V included, VP617415)		pcs.	
	MBH1	Support for mixer for installation on upper shelf for Salar 1x bracket for mixer and cup (incl. cup)	mander	pcs.	

Heated Cabinets "Standard"

Standard height 510 mm

Standard neight 510 mm	Item code	Description	Model	Length mm	Depth mm	Power kW	Abs. A	Price €
		Baking oven GN with folding door 1 baking sheet and 1 CriNi grate GN 2/1 included						
	976830	Oven GN 2/1 with folding door on one side 1 baking sheet and 1 CriNi grate GN 2/1 included Dimension: 800 x 760 x 510 mm Inside Dimension: 540 x 680 x 270 mm Connected load: 400V 50/60Hz 3L+N+PE	BO8-U-76	800	760	5,4 kW	3 x 16 A	
	976857	Oven "BM" GN 2/1-BB-86 with folding door on both sides 1 baking sheet and 1 CriNi grate GN 2/1 included Dimension: 850 x 860 x 510 mm Inside Dimension: 580 x 745 x 290 mm Connected load: 400V 50/60Hz 3L+N+PE	BO8-U 86 BB	850	860	5,6 kW	3 x 16 A	
	976865	Oven "BM" GN 2/1-BB-96 with folding door on both sides 1 baking sheet and 1 CriNi grate GN 2/1 included Dimension: 850 x 960 x 510 mm Inside Dimension: 580 x 845 x 290 mm Connected load: 400V 50/60Hz 3L+N+PE	BO8-U 96 BB	850	960	5,6 kW	3 x 16 A	
<u> </u>	976873	Oven "BM" GN 2/1-BB-106 with folding door on both sides 1 baking sheet and 1 CriNi grate GN 2/1 included Dimension: 850 x 1060 x 510 mm Inside Dimension: 580 x 945 x 290 mm Connected load: 400V 50/60Hz 3L+N+PE	BO8-U 106 BB	850	1060	9,2 kW	3 x 20 A	
	976903	Oven "BM" GN 2/1-BB-116 with folding door on both sides 1 baking sheet and 1 CriNi grate GN 2/1 included Dimension: 850 x 1160 x 510 mm Inside Dimension: 580 x 1045 x 290 mm Connected load: 400V 50/60Hz 3L+N+PE	BO8-U 116 BB	850	1160	9,2 kW	3 x 20 A	
	976911	Oven "BM" GN 2/1-BB-126 with folding door on both sides 1 baking sheet and 1 CriNi grate GN 2/1 included Dimension: 850 x 1260 x 510 mm Inside Dimension: 580 x 1145 x 290 mm Connected load: 400V 50/60Hz 3L+N+PE	BO8-U 126 BB	850	1260	11,2 kW	3 x 25 A	





Heated Cabinets "Standard"

Standard height 510 mm

Standard neight 510 mm	Item code	Description	Model	Length mm	Depth mm	Power kW	Abs. A	Price €
		Heated Cabinet with folding door All cabinets are heated by circulation air						
	885519	Heated Cabin et F 500L one-sided with folding door door hing ed on the left side heated by circulation air, incl. 1 storage shelf Inner dimensions: 345 x 710 x 430 mm Connected load: 230V 50/60Hz 1L+N+PE	WF5-UL 76	500	760	2,3 kW	16 A	
•	885520	Heated Cabinet F 500R one-sided with folding door door hing ed on the right side heated by circulation air, incl. 1 storage shelf Inner dimensions: 345 x 710 x 430 mm Connected load: 230V 50/60Hz 1L+N+PE	WF5-UR 76	500	760	2,3 kW	16 A	
i i		Heated Cabinet with vertical sliding door All cabinets are heated by circulation air						
	885521	Heated Cabinet R 800 one sided, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 645 x 710 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR8-U 76	800	760	2,3 kW	16 A	
	885522	Heated Cabinet R 800-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf inner dimensions: 645 x 810 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR8-U BB 86	800	860	2,3 kW	16 A	
	885523	Heated Cabinet R 800-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf inner dimensions: 645 x 910 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR8-U BB 96	800	960	2,3 kW	16 A	

Valid from 01.02.2023 25



Heated Cabinets "Standard" Standard height 510 mm

Standard height 510 mm	Item code	Description	Model	Length mm	Depth mm	Power kW	Abs. A	Price €
		Heated Cabinet with vertical sliding door All cabinets are heated by circulation air						
	885509	Heated Cabinet R 800-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 645 x 1010 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR8-U BB 106	800	1060	2,3 kW	16 A	
	885510	Heated Cabinet R 800-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 645 x 1110 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR8-U BB 116	800	1160	2,3 kW	16 A	
	885511	Heated Cabinet R 800-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 645 x 1210 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR8-U BB 126	800	1260	2,3 kW	16 A	
	885512	Heated Cabinet R 1000 one sided, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 845 x 710 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR10-U 76	1000	760	2,3 kW	16 A	
	885514	Heated Cabinet R 1000-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 845 x 810 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR10-U BB 86	1000	860	2,3 kW	16 A	
	885515	Heated Cabinet R 1000-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 845 x 910 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR10-U BB 96	1000	960	2,3 kW	16 A	
	885516	Heated Cabinet R 1000-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 845 x 1010 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR10-U BB 106	1000	1060	2,3 kW	16 A	
	885517	Heated Cabinet R 1000-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 845 x 1110 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR10-U BB 116	1000	1160	2,3 kW	16 A	
	885518	Heated Cabinet R 1000-BB on both sides, with vertical sliding door heated by circulation air, incl. 1 storage shelf Inner dimensions: 845 x 1210 x 395 mm Connected load: 230V 50/60Hz 1L+N+PE	WR10-U BB 126	1000	1260	2,3 kW	16 A	






Heated Cabinets "Standard"

•	•	_	-	-				_				-	-	_		_			 	
٥	3	ć	al	ı	d	ć	ar	d	h	е	iq	Ì	ηt	5	1	0	mm	1		

otandard noight 510 mm	Item code	Description	Model	Length mm	Depth mm	Power kW	Abs. A	Price €
		Heated Cabinet For Cups with drawer All cabinets are heated by circulation air						
	885502	Heated Cabinet For Cups S 700 with 2 drawers, Heated by circulation air Inner dimensions of drawer: 510 x 580 x 160 mm Connected load: 230V 50/60Hz 1L+N+PE	TWS7-U 76	700	760	2,3 kW	16 A	
		Heated Cabinets With Drawer All cabinets are Heated by circulation air						
	885503	Heated Cabinet With Drawer 700 Heated by circulation air Inner dimensions of drawer: 2 stacks; plates with 280 mm diameter Connected load: 230V 50/60Hz 1L+N+PE	WS7-U-1S-28T-46	700	460	2,3 kW	16 A	
	885504	Heated Cabinet With Drawer 800 Heated by circulation air Capacity: 2 stacks plates of 30 cm Connected load: 230V 50/60Hz 1L+N+PE	WS8-U-1S-30T-46	800	460	2,3 kW	16 A	
	885505	Heated Cabinet With Drawer 900 Heated by circulation air Capacity: 2 stacks plates of 30 cm Connected load: 230V 50/60Hz 1L+N+PE	WS9-U-1S-30T-46	900	460	2,3 kW	16 A	
	885506	Heated Cabinet With Drawer 700 Heated by circulation air Capacity: 3 stacks plates of 28 cm Connected load: 230V 50/60Hz 1L+N+PE	WS7-U-1S-28T-66	700	660	2,3 kW	16 A	
	885507	Heated Cabinet With Drawer 800 Heated by circulation air Capacity: 4 stacks plates of 28 cm Connected load: 230V 50/60Hz 1L+N+PE	WS8-U-1S-30T-66	800	660	2,3 kW	16 A	
	885508	Heated Cabinet With Drawer 900 Heated by circulation air Capacity: 4 stacks plates of 30 cm Connected load: 230V 50/60Hz 1L+N+PE	WS9-U-1S-30T-66	900	660	2,3 kW	16 A	





Base Cabinets "Standard" Standard height 510 mm

Standard height 510 mm	Item code	Description	Model	Length mm	Depth mm	Price €
		Base Cabinets Closed On Three Sides EB all cabinets are equipped with one shelf	360			
	BC404578	Base Cabinet Closed On Three Sides 400 open on one side with 1 storage shelf Dimension: 347 x 360 x 458 mm	TO4-U 36EB	400	360	
	BC404565	Base Cabinet Closed On Three Sides 500 open on one side with 1 storage shelf Dimension: 447 x 360 x 458 mm	TO5-U 36EB	500	360	
	BC404580	Base Cabinet Closed On Three Sides 600 open on one side with 1 storage shelf Dimension: 447 x 360 x 458 mm	TO6-U 36EB	600	360	
	BC404583	Base Cabinet Closed On Three Sides 700 open on one side with 1 storage shelf Dimension: 647 x 360 x 458 mm	TO7-U 36EB	700	360	
	BC404576	Base Cabinet Closed On Three Sides 800 open on one side with 1 storage shelf Dimension: 747 x 360 x 458 mm	TO8-U 36EB	800	360	
	BC404581	Base Cabinet Closed On Three Sides 900 open on one side with 1 storage shelf Dimension: 847 x 360 x 458 mm	TO9-U 36EB	900	360	
	BC 40 4585	Base Cabinet Closed On Three Sides 1000 open on one side with 1 storage shelf Dimension: 947 x 360 x 458 mm	TO 10-U 36 EB	1000	360	
	BC404589	Base Cabinet Closed On Three Sides 1100 open on one side with 1 storage shelf Dimension: 1047 x 360 x 458 mm	TO 11-U 36 EB	1100	360	
	BC404596	Base Cabinet Closed On Three Sides 1200 open on one side with 1 storage shelf Dimension: 1147 x 360 x 458 mm	TO 12-U 36 EB	1200	360	



Base Cabinets "Standard" Standard height 510 mm

Item code Description Model Length Depth Price mm mm Base Cabinets Closed On Three Sides EB 460 all cabinets are equipped with one shelf Base Cabinet Closed On Three Sides 400 BC404587 TO4-U 46EB 400 460 open on one side with 1 storage shelf Dimension: 347 x 460 x 458 mm BC404566 Base Cabinet Closed On Three Sides 500 TO5-U 46EB 500 460 open on one side with 1 storage shelf Dimension: 447 x 460 x 458 mm BC404591 Base Cabinet Closed On Three Sides 600 TO6-U 46EB 600 460 open on one side with 1 storage shelf Dimension: 447 x 460 x 458 mm TO7-U 46EB BC404573 Base Cabinet Closed On Three Sides 700 700 460 open on one side with 1 storage shelf Dimension: 647 x 460 x 458 mm BC404577 Base Cabinet Closed On Three Sides 800 TO8-U 46EB 800 460 open on one side with 1 storage shelf Dimension: 747 x 460 x 458 mm BC404582 Base Cabinet Closed On Three Sides 900 TO9-U 46EB 900 460 open on one side with 1 storage shelf Dimension: 847 x 460 x 458 mm BC404586 Base Cabinet Closed On Three Sides 1000 TO10-U 46 EB 1000 460 open on one side with 1 storage shelf Dimension: 947 x 460 x 458 mm BC404590 Base Cabinet Closed On Three Sides 1100 TO11-U 46 EB 1100 460 open on one side with 1 storage shelf Dimension: 1047 x 460 x 458 mm BC404597 Base Cabinet Closed On Three Sides 1200 TO12-U 46 EB 1200 460 open on one side with 1 storage shelf Dimension: 1147 x 460 x 458 mm



Base Cabinets "Standard" Standard height 510 mm

Standard height 510 mm	Item code	Description	Model	Length mm	Depth mm	Price €
		Base Cabinets Closed On Three Sides EB all cabinets are equipped with one shelf	660			
	BC400351	Base Cabinet Closed On Three Sides 400 open on one side with 1 storage shelf Dimension: 347 x 660 x 458 mm	TO 4 -U 66EB	400	660	
	BC400352	Base Cabinet Closed On Three Sides 500 open on one side with 1 storage shelf Dimension: 447 x 660 x 458 mm	TO5-U 66EB	500	660	
	BC400353	Base Cabinet Closed On Three Sides 600 open on one side with 1 storage shelf Dimension: 447 x 660 x 458 mm	TO6-U 66EB	600	660	
	BC404680	Base Cabinet Closed On Three Sides 700 open on one side with 1 storage shelf Dimension: 647 x 660 x 458 mm	TO7-U 66EB	700	660	
	BC400354	Base Cabinet Closed On Three Sides 800 open on one side with 1 storage shelf Dimension: 747 x 660 x 458 mm	TO8-U 66EB	800	660	
	BC404681	Base Cabinet Closed On Three Sides 900 open on one side with 1 storage shelf Dimension: 847 x 660 x 458 mm	TO9-U 66EB	900	660	
	BC400355	Base Cabinet Closed On Three Sides 1000 open on one side with 1 storage shelf Dimension: 947 x 660 x 458 mm	TO10-U 66 EB	1000	660	
	BC404683	Base Cabinet Closed On Three Sides 1100 open on one side with 1 storage shelf Dimension: 1047 x 660 x 458 mm	TO11-U 66 EB	1100	660	
	BC400356	Base Cabinet Closed On Three Sides 1200 open on one side with 1 storage shelf Dimension: 1147 x 660 x 456 mm	TO12-U 66 EB	1200	660	



Base Cabinets "Standard" Standard height 510 mm

Standard height 510 mm	ltem code	Description	Model	Length mm	Depth mm	Price €
		Base Cabinets Closed On Three Sides EB all cabinets are equipped with one shelf	760			
	BC400952	Base Cabinet Closed On Three Sides 400 open on one side with 1 storage shelf Dimension: 347 x 760 x 458 mm	TO4-U 76EB	400	760	
	BC400953	Base Cabinet Closed On Three Sides 500 open on one side with 1 storage shelf Dimension: 447 x 760 x 458 mm	TO5-U 76EB	500	760	
	BC400954	Base Cabinet Closed On Three Sides 600 open on one side with 1 storage shelf Dimension: 447 x 760 x 458 mm	TO6-U 76EB	600	760	
	BC400955	Base Cabinet Closed On Three Sides 700 open on one side with 1 storage shelf Dimension: 647 x 760 x 458 mm	TO7-U 76EB	700	760	
	BC400956	Base Cabinet Closed On Three Sides 800 open on one side with 1 storage shelf Dimension: 747 x 760 x 458 mm	TO8-U 76EB	800	760	
	BC400957	Base Cabinet Closed On Three Sides 900 open on one side with 1 storage shelf Dimension: 847 x 760 x 458 mm	TO9-U 76EB	900	760	
	BC400958	Base Cabinet Closed On Three Sides 1000 open on one side with 1 storage shelf Dimension: 947 x 760 x 458 mm	TO 10-U 76 EB	1000	760	
	BC400980	Base Cabinet Closed On Three Sides 1100 open on one side with 1 storage shelf Dimension: 1047 x 760 x 458 mm	TO 11-U 76 EB	1100	760	
	BC400959	Base Cabinet Closed On Three Sides 1200 open on one side with 1 storage shelf Dimension: 1147 x 760 x 458 mm	TO 12-U 76 EB	1200	760	



Base Cabinets "Standard" Standard height 510 mm

Item code Description Model Length Depth Price mm mm Base Cabinets Open On Both Sides EB 860 all cabinets are equipped with one shelf BC404662 Base Cabinet Open On Both Sides 400-BB open on both sides TO4-U 86BB 400 860 with 1 storage shelf Dimension: 347 x 860 x 458 mm BC404663 Base Cabinet Open On Both Sides 500-BB TO5-U 86BB 500 860 open on both sides with 1 storage shelf Dimension: 447 x 860 x 458 mm Base Cabinet Open On Both Sides 600-BB BC404664 TO6-U 86BB 600 860 open on both sides with 1 storage shelf Dimension: 547 x 860 x 458 mm TO7-U 86BB BC404665 Base Cabinet Open On Both Sides 700-BB 700 860 open on both sides with 1 storage shelf Dimension: 647 x 860 x 458 mm BC404666 Base Cabinet Open On Both Sides 800-BB TO8-U 86BB 800 860 open on both sides with 1 storage shelf Dimension: 747 x 860 x 458 mm BC404679 Base Cabinet Open On Both Sides 900-BB TO9-U 86BB 900 860 open on both sides with 1 storage shelf Dimension: 847 x 860 x 458 mm BC404668 Base Cabinet Open On Both Sides 1000-BB TO10-U 86 BB 1000 860 open on both sides with 1 storage shelf Dimension: 947 x 860 x 458 mm BC404682 Base Cabinet Open On Both Sides 1100-BB TO11-U 86 BB 1100 860 open on both sides with 1 storage shelf Dimension: 1047 x 860 x 458 mm BC404669 Base Cabinet Open On Both Sides 1200-BB TO12-U 86 BB 1200 860 open on both sides with 1 storage shelf Dimension: 1147 x 860 x 458 mm



Base Cabinets "Standard" Standard height 510 mm

Standard height 510 mm	ltem code	Description	Model	Length mm	Depth mm	Price €
		Base Cabinets Open On Both Sides BB all cabinets are equipped with one shelf	960			
	BC404762	Base Cabinet Open On Both Sides 400-BB open on both sides with 1 storage shelf Dimension: 347 x 960 x 458 mm	TO4-U 96BB	400	960	
	BC404763	Base Cabinet Open On Both Sides 500-BB open on both sides with 1 storage shelf Dimension: 447 x 960 x 458 mm	TO5-U 96BB	500	960	
	BC404764	Base Cabinet Open On Both Sides 600-BB open on both sides with 1 storage shelf Dimension: 547 x 960 x 458 mm	TO6-U 96BB	600	960	
	BC404765	Base Cabinet Open On Both Sides 700-BB open on both sides with 1 storage shelf Dimension: 647 x 960 x 458 mm	TO7-U 96BB	700	960	
	BC404766	Base Cabinet Open On Both Sides 800-BB open on both sides with 1 storage shelf Dimension: 747 x 960 x 458 mm	TO8-U 96BB	800	960	
	BC404779	Base Cabinet Open On Both Sides 900-BB open on both sides with 1 storage shelf Dimension: 847 x 960 x 458 mm	TO9-U 96BB	900	960	
	BC404768	Base Cabinet Open On Both Sides 1000-BB open on both sides with 1 storage shelf Dimension: 947 x 960 x 458 mm	TO 10-U 96 BB	1000	960	
	BC404782	Base Cabinet Open On Both Sides 1100-BB open on both sides with 1 storage shelf Dimension: 1047 x 960 x 458 mm	TO 11-U 96 BB	1100	960	
	BC404769	Base Cabinet Open On Both Sides 1200-BB open on both sides with 1 storage shelf Dimension: 1147 x 960 x 458 mm	TO 12-U 96 BB	1200	960	



Base Cabinets "Standard" Standard height 510 mm

Item code Description Model Length Depth Price mm mm Base Cabinets Open On Both Sides BB 1060 all cabinets are equipped with one shelf BC404598 Base Cabinet Open On Both Sides 400-BB open on both sides TO4-U 106 BB 400 1060 with 1 storage shelf Dimension: 347 x 1060 x 458 mm BC404568 Base Cabinet Open On Both Sides 500-BB TO5-U 106 BB 500 1060 open on both sides with 1 storage shelf Dimension: 447 x 1060 x 458 mm Base Cabinet Open On Both Sides 600-BB BC404571 TO6-U 106 BB 600 1060 open on both sides with 1 storage shelf Dimension: 547 x 1060 x 458 mm TO7-U 106 BB BC404575 Base Cabinet Open On Both Sides 700-BB 700 1060 open on both sides with 1 storage shelf Dimension: 647 x 1060 x 458 mm BC404579 Base Cabinet Open On Both Sides 800-BB TO8-U 106 BB 800 1060 open on both sides with 1 storage shelf Dimension: 747 x 1060 x 458 mm BC404584 Base Cabinet Open On Both Sides 900-BB TO9-U 106 BB 900 1060 open on both sides with 1 storage shelf Dimension: 847 x 1060 x 458 mm BC404588 Base Cabinet Open On Both Sides 1000-BB TO10-U 106BB 1000 1060 open on both sides with 1 storage shelf Dimension: 947 x 1060 x 458 mm BC404595 Base Cabinet Open On Both Sides 1100-BB TO11-U BB 106 1100 1060 open on both sides with 1 storage shelf Dimension: 1047 x 1060 x 458 mm BC404599 Base Cabinet Open On Both Sides 1200-BB TO12-U 106BB 1200 1060 open on both sides with 1 storage shelf Dimension: 1147 x 1060 x 458 mm



Base Cabinets "Standard" Standard height 510 mm

Item code Description Model Length Depth Price mm mm Base Cabinets Open On Both Sides BB 1160 all cabinets are equipped with one shelf BC404862 Base Cabinet Open On Both Sides 400-BB open on both sides TO4-U 116 BB 400 1160 with 1 storage shelf Dimension: 347 x 1160 x 458 mm BC404863 Base Cabinet Open On Both Sides 500-BB TO5-U 116 BB 500 1160 open on both sides with 1 storage shelf Dimension: 447 x 1160 x 458 mm Base Cabinet Open On Both Sides 600-BB BC404864 TO6-U 116 BB 600 1160 open on both sides with 1 storage shelf Dimension: 547 x 1160 x 458 mm TO7-U 116 BB BC404865 Base Cabinet Open On Both Sides 700-BB 700 1160 open on both sides with 1 storage shelf Dimension: 647 x 1160 x 458 mm BC404866 Base Cabinet Open On Both Sides 800-BB TO8-U 116 BB 800 1160 open on both sides with 1 storage shelf Dimension: 747 x 1160 x 458 mm BC404879 Base Cabinet Open On Both Sides 900-BB TO9-U 116 BB 900 1160 open on both sides with 1 storage shelf Dimension: 847 x 1160 x 458 mm BC404868 Base Cabinet Open On Both Sides 1000-BB TO10-U 116BB 1000 1160 open on both sides with 1 storage shelf Dimension: 947 x 1160 x 458 mm BC404882 Base Cabinet Open On Both Sides 1100-BB TO11-U 116BB 1100 1160 open on both sides with 1 storage shelf Dimension: 1047 x 1160 x 458 mm BC404869 Base Cabinet Open On Both Sides 1200-BB TO12-U 116BB 1200 1160 open on both sides with 1 storage shelf Dimension: 1147 x 1160 x 458 mm



Base Cabinets "Standard" Standard height 510 mm

Standard height 510 mm	ltem code	Description	Model	Length mm	Depth mm	Price €
		Base Cabinets Open On Both Sides BB all cabinets are equipped with one shelf	1 260			
	BC404870	Base Cabinet Open On Both Sides 400-BB open on both sides with 1 storage shelf Dimension: 347 x 1260 x 458 mm	TO4-U 126 BB	400	1260	
	BC404871	Base Cabinet Open On Both Sides 500-BB open on both sides with 1 storage shelf Dimension: 447 x 1260 x 458 mm	TO5-U 126 BB	500	1260	
	BC404872	Base Cabinet Open On Both Sides 600-BB open on both sides with 1 storage shelf Dimension: 547 x 1260 x 458 mm	TO6-U 126 BB	600	1260	
	BC404873	Base Cabinet Open On Both Sides 700-BB open on both sides with 1 storage shelf Dimension: 647 x 1260 x 458 mm	TO7-U 126 BB	700	1260	
	BC404874	Base Cabinet Open On Both Sides 800-BB open on both sides with 1 storage shelf Dimension: 747 x 1260 x 458 mm	TO8-U 126 BB	800	1260	
	BC404875	Base Cabinet Open On Both Sides 900-BB open on both sides with 1 storage shelf Dimension: 847 x 1260 x 458 mm	TO9-U 126 BB	900	1260	
	BC404876	Base Cabinet Open On Both Sides 1000-BB open on both sides with 1 storage shelf Dimension: 947 x 1260 x 458 mm	TO10-U 126BB	1000	1260	
	BC404877	Base Cabinet Open On Both Sides 1100-BB open on both sides with 1 storage shelf Dimension: 1047 x 1260 x 458 mm	TO11-U 126BB	1100	1260	
	BC404878	Base Cabinet Open On Both Sides 1200-BB open on both sides with 1 storage shelf Dimension: 1147 x 1260 x 458 mm	TO12-U 126BB	1200	1260	



Base Cabinets "Standard"

Base Cabinets "Standard"						
Standard height 510 mm	Item code	Description	Model	Length mm	Depth mm	Price €
		Folding Door Kit Base Cabinets For Folding Closed On Three Sides				
		Folding Door Kit not available for H2				
	BC400857	Folding Door Kit 400 Folding door hinged on the left or right	FT-4-U	400		
Suitable for all TO-U Base Cabinets	BC 400858	Folding Door Kit 500 Folding door hinged on the left or right	FT-5-U	500		
	BC400859	Folding Door Kit 600 Folding door hinged on the left or right	FT-6-U	600		
	BC400860	<u>Folding Door Kit 800</u> Folding door hinged on the left or right	FT-8-U	800		
	BC400865	<u>Folding Door Kit 1000</u> Folding door hinged on the left or right	FT-10-U	1000		
Suitable for all TO-U Base Cabinets	BC400866	Folding Door Kit 1200 Folding door hinged on the left or right	FT-12-U	1200		
		Base cabinets for Deep Fat Fryer Drop-In Unit	760			
		Base Cabinets For Folding Closed On Three Sides				
	BC404944	Base Cabinet For Deep Fat Fryer 400 L 1 folding door, Door hinged on the left	SFFP-U51-76-1B-L	400	760	
	BC404945	Base Cabinet For Deep Fat Fryer 400 R for drop-in unit, Single pan 1 folding door, Door hinged on the right	SFFP-U51-76-1B-R	400	760	
	BC404970	Base Cabinet For Deep Fat Fryer 500 L for drop∹n unit, Single pan 1 folding door, Door hinged on the left	SFFP-U51-76-1B-L	500	760	
	BC404971	Base Cabinet For Deep Fat Fryer 500 R for drop-in unit, Single pan 1 folding door, Door hinged on the right	SFFP-U51-76-1B-R	500	760	
	BC 40 49 46	Base Cabinet For Deep Fat Fryer 600 L for drop-in unit, Dual pan 1 folding door, Door hinged on the left	SFFP-U51-76-2B-L	600	760	
	BC404947	Base Cabinet For Deep Fat Fryer 600 R for drop-in unit, Dual pan 1 folding door, Door hinged on the right	SFFP-U51-76-2B-R	600	760	
	BC404972	Base Cabinet For Deep Fat Fryer 700 LR for drop-in unit, Dual pan 2 folding doors, doors hinged on the right and left	SFFP-U51-76-2B-LR	700	760	
		Base cabinets for Pasta cooker				
	BC404920	Base Cabinet For Pasta Cooker G N 1/1 400 L 1 folding door, door hinged on the left	SFP4-U51-L-76-EB	400	760	
	BC404921	Base Cabinet For Pasta Cooker G N 1/1 400 R 1 folding door, door hinged on the right	SFP4-U51-R-76-EB	400	760	
	BC404922	Base Cabinet For Pasta Cooker G N 1/1 600 L 1 folding door, door hinged on the left	SFP6-U51-L-76-EB	600	760	
	BC404923	Base Cabinet For Pasta Cooker G N 1/1 600 R 1 folding door, door hinged on the right	SFP6-U51-R-76-EB	600	760	
	BC404924	Base Cabinet For Pasta Cooker G N 1/1 700 LR 2 folding doors, doors hinged on the right and left	SFP7-U51-LR-76-EB	700	760	
		Base cabinets with GN supports	760			
		All base cabinets are equipped with 3 GN-inserts	-			
	BC400970	Base Cabinet With GN Supports 400 open on one side, with 3 supports for GN 1/1	NO4-U 76	400	760	
	BC400971	Base Cabinet With G N Supports 600 open on one side, with 3 supports for GN 2/1	NO6-U 76	600	760	



Base Cabinets "Standard" Standard height 510 mm

ndard height 510 mm	Item code		Description	Model	Length mm	Depth mm	Price €
			Base cabinets for installations				
			CAUTION The installation compartments / sub-distributions must not be located directly on ovens, heating cabinets or other heat sources.				
	873799		Base Cabinet For Installations 200 terminal box for installations, up to 6 connections	200 x 510 mm		Pcs.	
	873829		Base Cabinet For Installations 300 terminal box for installations, up to 10 connections	300 x 510 mm		Pcs.	
	887439		Base Cabinet For Installations 400 terminal box for installations, up to 14 connections	400 x 510 mm		Pcs.	
	888566		Base Cabinet For Installations >200 - 299 terminal box for installations, up to 6 connections	2xx x 510 mm		Pcs.	
	888567		Base Cabinet For Installations >300 - 399 terminal box for installations, up to 10 connections	3xx x 510 mm		Pcs.	
			Base cabinets for Generator compartment for induction generator	760			
	892814		Base Cabinet For Generator 200 compartement for up to 4 induction generators	GF2-U 76	200	760	
	892815		Base Cabinet For Generator 400 compartement for up to 8 induction generators	GF4-U 76	400	760	
- annual E			Base cabinets for Holdomat Base cabinet for a small Holdomat 3 x GN 1/1	760			
	BC400986		Base Cabinet For Holdomat 500 open on one side, for Hold-o-mat Standard 300, KTM 311, Household 323 Console and cut out for plug included	HDS5-U 76	500	760	
		>>	so cket	see page			22
			Base cabinet for Alto Shaam suitable for Alto Shaam warming drawer element	760			
	BC400983		Base Cabinet For Alto-Shaam 700 open on one side,		700	760	
		>>	cut out for plug included so cket	see page			22





Base Cabinets "Hygiene-H2" Hygienic design H2 Standard height 510 mm Item code Description Model Length Depth

Hygienic design H2 Standar	d height 510 mm Item code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, closed on three sides all cabinets are equipped with one shelf	340			
	BZ405970	Base Cabinet H2 Closed On Three Sides 400 Open on one side 1 storage shelf Dimension: 336 x 329 x 430 mm	TO4UV-H2-34-EB	400	340	
	BZ405971	Base Cabinet H2 Closed On Three Sides 500 Open on one side 1 storage shelf Dimension: 436 x 329 x 430 mm	TO5UV-H2-34-EB	500	340	
	BZ405972	Base Cabinet H2 Closed On Three Sides 600 Open on one side 1 storage shelf Dimension: 536 x 329 x 430 mm	TO6UV-H2-34-EB	600	340	
	BZ405973	Base Cabinet H2 Closed On Three Sides 700 Open on one side 1 storage shelf Dimension: 636 x 329 x 430 mm	TO7UV-H2-34-EB	700	340	
	BZ405974	Base Cabinet H2 Closed On Three Sides 800 Open on one side 1 storage shelf Dimension: 736 x 329 x 430 mm	TO8UV-H2-34-EB	800	340	
	BZ405975	Base Cabinet H2 Closed On Three Sides 900 Open on one side 1 storage shelf Dimension: 836 x 329 x 430 mm	TO9UV-H2-34-EB	900	340	
	BZ405976	Base Cabinet H2 Closed On Three Sides 1000 Open on one side 1 storage shelf Dimension: 936 x 329 x 430 mm	TO10UV-H2-34-EB	1000	340	
	BZ405977	Base Cabinet H2 Closed On Three Sides 1100 Open on one side 1 storage shelf Dimension: 1036 x 329 x 430 mm	TO11UV-H2-34-EB	1100	340	
	BZ405978	Base Cabinet H2 Closed On Three Sides 1200 Open on one side 1 storage shelf Dimension: 1136 x 329 x 430 mm	TO12UV-H2-34-EB	1200	340	



Hygienic design H2 Standard	ltem code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, closed on three sides all cabinets are equipped with one shelf	440			
	BZ405990	Base Cabinet H2 Closed On Three Sides 400 Open on one side 1 storage shelf Dimension: 336 x 429 x 430 mm	TO4UV-H2-44-EB	400	440	
	BZ405991	Base Cabinet H2 Closed On Three Sides 500 Open on one side 1 storage shelf Dimension: 436 x 429 x 430 mm	TO5UV-H2-44-EB	500	440	
	BZ405992	Base Cabinet H2 Closed On Three Sides 600 Open on one side 1 storage shelf Dimension: 536 x 429 x 430 mm	TO6UV-H2-44-EB	600	440	
	BZ405993	Base Cabinet H2 Closed On Three Sides 700 Open on one side 1 storage shelf Dimension: 636 x 429 x 430 mm	TO7UV-H2-44-EB	700	440	
	BZ405994	Base Cabinet H2 Closed On Three Sides 800 Open on one side 1 storage shelf Dimension: 736 x 429 x 430 mm	TO8UV-H2-44-EB	800	440	
	BZ405995	Base Cabinet H2 Closed On Three Sides 900 Open on one side 1 storage shelf Dimension: 836 x 429 x 430 mm	TO9UV-H2-44-EB	900	440	
	BZ405996	Base Cabinet H2 Closed On Three Sides 1000 Open on one side 1 storage shelf Dimension: 936 x 429 x 430 mm	TO10UV-H2-44-EB	1000	440	
	BZ405997	Base Cabinet H2 Closed On Three Sides 1100 Open on one side 1 storage shelf Dimension: 1036 x 429 x 430 mm	TO11UV-H2-44-EB	1100	440	
	BZ405998	Base Cabinet H2 Closed On Three Sides 1200 Open on one side 1 storage shelf Dimension: 1136 x 429 x 430 mm	TO12UV-H2-44-EB	1200	440	




Hygienic design H2 Standard	ltem code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, closed on three sides all cabinets are equipped with one shelf	640			
	BZ405020	Base Cabinet H2 Closed On Three Sides 400 Open on one side 1 storage shelf Dimension: 336 x 628 x 430 mm	TO4UV-H2-64-EB	400	640	
	BZ405021	Base Cabinet H2 Closed On Three Sides 500 Open on one side 1 storage shelf Dimension: 436 x 629 x 430 mm	TO5UV-H2-64-EB	500	640	
	BZ405022	Base Cabinet H2 Closed On Three Sides 600 Open on one side 1 storage shelf Dimension: 536 x 629 x 430 mm	TO6UV-H2-64-EB	600	640	
	BZ405019	Base Cabinet H2 Closed On Three Sides 700 Open on one side 1 storage shelf Dimension: 636 x 629 x 430 mm	TO7UV-H2-64-EB	700	640	
	BZ405023	Base Cabinet H2 Closed On Three Sides 800 Open on one side 1 storage shelf Dimension: 736 x 629 x 430 mm	TO8UV-H2-64-EB	800	640	
	BZ405028	Base Cabinet H2 Closed On Three Sides 900 Open on one side 1 storage shelf Dimension: 836 x 629 x 430 mm	TO9UV-H2-64-EB	900	640	
	BZ405024	Base Cabinet H2 Closed On Three Sides 1000 Open on one side 1 storage shelf Dimension: 936 x 629 x 430 mm	TO10UV-H2-64-EB	1000	640	
	BZ405029	Base Cabinet H2 Closed On Three Sides 1100 Open on one side 1 storage shelf Dimension: 1036 x 629 x 430 mm	TO11UV-H2-64-EB	1100	640	
	BZ405025	Base Cabinet H2 Closed On Three Sides 1200 Open on one side 1 storage shelf Dimension: 1136 x 629 x 430 mm	TO12UV-H2-64-EB	1200	640	



Base Cabinets "Hygiene-H2"
Hygienic design H2 Standard height 510 mm
Item code Description Model Length Depth Price

ltem code	Description	Model	Length mm	Depth mm	Price €
	Hygiene base cabinets H2, closed on three sides all cabinets are equipped with one shelf	710			
BZ405642	Base Cabinet H2 Closed On Three Sides 400 Open on one side 1 storage shelf Dimension: 336 x 699 x 430 mm	TO4UV-H2-71-EB	400	710	
BZ405643	Base Cabinet H2 Closed On Three Sides 500 Open on one side 1 storage shelf Dimension: 436 x 699 x 430 mm	TO5UV-H2-71-EB	500	710	
BZ405644	Base Cabinet H2 Closed On Three Sides 600 Open on one side 1 storage shelf Dimension: 536 x 699 x 430 mm	TO6UV-H2-71-EB	600	710	
BZ405645	Base Cabinet H2 Closed On Three Sides 700 Open on one side 1 storage shelf Dimension: 636 x 699 x 430 mm	TO7UV-H2-71-EB	700	710	
BZ405646	Base Cabinet H2 Closed On Three Sides 800 Open on one side 1 storage shelf Dimension: 736 x 699 x 430 mm	TO8UV-H2-71-EB	800	710	
BZ405647	Base Cabinet H2 Closed On Three Sides 900 Open on one side 1 storage shelf Dimension: 836 x 699 x 430 mm	TO9UV-H2-71-EB	900	710	
BZ405648	Base Cabinet H2 Closed On Three Sides 1000 Open on one side 1 storage shelf Dimension: 936 x 699 x 430 mm	TO10UV-H2-71-EB	1000	710	
BZ405649	Base Cabinet H2 Closed On Three Sides 1100 Open on one side 1 storage shelf Dimension: 1036 x 699 x 430 mm	TO11UV-H2-71-EB	1100	710	
BZ405650	Base Cabinet H2 Closed On Three Sides 1200 Open on one side 1 storage shelf Dimension: 1136 x 699 x 430 mm	TO12UV-H2-71-EB	1200	710	



Hygienic design H2 Standard	height 510 mm Item code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, open on both sides all cabinets are equipped with one shelf	860			
	BZ405682	Base Cabinet H2 Open On Both Sides 400-BB open on both sides 1 storage shelf Dimension: 336 x 849 x 430 mm	TO4UV-H2-86-BB	400	860	
	BZ405683	Base Cabinet H2 Open On Both Sides 500-BB open on both sides 1 storage shelf Dimension: 436 x 849 x 430 mm	TO5UV-H2-86-BB	500	860	
	BZ405684	Base Cabinet H2 Open On Both Sides 600-BB open on both sides 1 storage shelf Dimension: 536 x 849 x 430 mm	TO6UV-H2-86-BB	600	860	
	BZ405685	Base Cabinet H2 Open On Both Sides 700-BB open on both sides 1 storage shelf Dimension: 636 x 849 x 430 mm	TO7UV-H2-86-BB	700	860	
	BZ405686	Base Cabinet H2 Open On Both Sides 800-BB open on both sides 1 storage shelf Dimension: 736 x 849 x 430 mm	TO8UV-H2-86-BB	800	860	
	BZ405687	Base Cabinet H2 Open On Both Sides 900-BB open on both sides 1 storage shelf Dimension: 836 x 849 x 430 mm	TO9UV-H2-86-BB	900	860	
	BZ405688	Base Cabinet H2 Open On Both Sides 1000-BB open on both sides 1 storage shelf Dimension: 936 x 849 x 430 mm	TO10UV-H2-86-BB	1000	860	
	BZ405689	Base Cabinet H2 Open On Both Sides 1100-BB open on both sides 1 storage shelf Dimension: 1036 x 849 x 430 mm	TO11UV-H2-86-BB	1100	860	
	BZ405690	Base Cabinet H2 Open On Both Sides 1200-BB open on both sides 1 storage shelf Dimension: 1136 x 849 x 430 mm	TO12UV-H2-86-BB	1200	860	



Hygienic design H2 Standaı	rd height 510 mm Item code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, open on both sides all cabinets are equipped with one shelf	960			
	BZ405702	Base Cabinet H2 Open On Both Sides 400-BB open on both sides 1 storage shelf Dimension: 336 x 949 x 430 mm	TO4UV-H2-96-BB	400	960	
	BZ405703	Base Cabinet H2 Open On Both Sides 500-BB open on both sides 1 storage shelf Dimension: 436 x 949 x 430 mm	TO5UV-H2-96-BB	500	960	
	BZ405704	Base Cabinet H2 Open On Both Sides 600-BB open on both sides 1 storage shelf Dimension: 536 x 949 x 430 mm	TO6UV-H2-96-BB	600	960	
	BZ405705	Base Cabinet H2 Open On Both Sides 700-BB open on both sides 1 storage shelf Dimension: 636 x 949 x 430 mm	TO7UV-H2-96-BB	700	960	
	BZ405706	Base Cabinet H2 Open On Both Sides 800-BB open on both sides 1 storage shelf Dimension: 736 x 949 x 430 mm	TO8UV-H2-96-BB	800	960	
	BZ405707	Base Cabinet H2 Open On Both Sides 900-BB open on both sides 1 storage shelf Dimension: 836 x 949 x 430 mm	TO9UV-H2-96-BB	900	960	
	BZ405708	Base Cabinet H2 Open On Both Sides 1000-BB open on both sides 1 storage shelf Dimension: 936 x 949 x 430 mm	TO10UV-H2-96-BB	1000	960	
	BZ405709	Base Cabinet H2 Open On Both Sides 1100-BB open on both sides 1 storage shelf Dimension: 1036 x 949 x 430 mm	TO11UV-H2-96-BB	1100	960	
	BZ405710	Base Cabinet H2 Open On Both Sides 1200-BB open on both sides 1 storage shelf Dimension: 1136 x 949 x 430 mm	TO12UV-H2-96-BB	1200	960	



Base Cabinets "Hygiene-H2"

Hygienic design H2 Standard	l height 510 mm Item code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, open on both sides all cabinets are equipped with one shelf	1060			
	BZ405722	Base Cabinet H2 Open On Both Sides 400-BB open on both sides 1 storage shelf Dimension: 336 x 1049 x 430 mm	TO4UV-H2-106-BB	400	1060	
	BZ405723	Base Cabinet H2 Open On Both Sides 500-BB open on both sides 1 storage shelf Dimension: 436 x 1049 x 430 mm	TO5UV-H2-106-BB	500	1060	
	BZ405724	Base Cabinet H2 Open On Both Sides 600-BB open on both sides 1 storage shelf Dimension: 536 x 1049 x 430 mm	TO6UV-H2-106-BB	600	1060	
	BZ405725	Base Cabinet H2 Open On Both Sides 700-BB open on both sides 1 storage shelf Dimension: 636 x 1049 x 430 mm	TO7UV-H2-106-BB	700	1060	
	BZ405726	Base Cabinet H2 Open On Both Sides 800-BB open on both sides 1 storage shelf Dimension: 736 x 1049 x 430 mm	TO8UV-H2-106-BB	800	1060	
	BZ405727	Base Cabinet H2 Open On Both Sides 900-BB open on both sides 1 storage shelf Dimension: 836 x 1049 x 430 mm	TO9UV-H2-106-BB	900	1060	
	BZ405728	Base Cabinet H2 Open On Both Sides 1000-BB open on both sides 1 storage shelf Dimension: 936 x 1049 x 430 mm	TO10UV-H2-106-BB	1000	1060	
	BZ405729	Base Cabinet H2 Open On Both Sides 1100-BB open on both sides 1 storage shelf Dimension: 1036 x 1049 x 430 mm	TO11UV-H2-106-BB	1100	1060	
	BZ405730	Base Cabinet H2 Open On Both Sides 1200-BB open on both sides 1 storage shelf Dimension: 1136 x 1049 x 430 mm	TO12UV-H2-106-BB	1200	1060	



Hygienic design H2 Standard	ltem code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, open on both sides all cabinets are equipped with one shelf	1160			
	BZ405742	Base Cabinet H2 Open On Both Sides 400-BB open on both sides 1 storage shelf Dimension: 336 x 1149 x 430 mm	TO4UV-H2-116-BB	400	1160	
	BZ405743	Base Cabinet H2 Open On Both Sides 500-BB open on both sides 1 storage shelf Dimension: 436 x 1149 x 430 mm	TO5UV-H2-116-BB	500	1160	
	BZ405744	Base Cabinet H2 Open On Both Sides 600-BB open on both sides 1 storage shelf Dimension: 536 x 1149 x 430 mm	TO6UV-H2-116-BB	600	1160	
	BZ405745	Base Cabinet H2 Open On Both Sides 700-BB open on both sides 1 storage shelf Dimension: 636 x 1149 x 430 mm	TO7UV-H2-116-BB	700	1160	
	BZ405746	Base Cabinet H2 Open On Both Sides 800-BB open on both sides 1 storage shelf Dimension: 736 x 1149 x 430 mm	TO8UV-H2-116-BB	800	1160	
	BZ405747	Base Cabinet H2 Open On Both Sides 900-BB open on both sides 1 storage shelf Dimension: 836 x 1149 x 430 mm	TO9UV-H2-116-BB	900	1160	
	BZ405748	Base Cabinet H2 Open On Both Sides 1000-BB open on both sides 1 storage shelf Dimension: 936 x 1149 x 430 mm	TO10UV-H2-116-BB	1000	1160	
	BZ405749	Base Cabinet H2 Open On Both Sides 1100-BB open on both sides 1 storage shelf Dimension: 1036 x 1149 x 430 mm	TO11UV-H2-116-BB	1100	1160	
	BZ405750	Base Cabinet H2 Open On Both Sides 1200-BB open on both sides 1 storage shelf Dimension: 1136 x 1149 x 430 mm	TO12UV-H2-116-BB	1200	1160	



rrygienic design 112 Standard	Item code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2, open on both sides all cabinets are equipped with one shelf	1260			
	BZ405762	Base Cabinet H2 Open On Both Sides 400-BB open on both sides 1 storage shelf Dimension: 336 x 1249 x 430 mm	TO4UV-H2-126-BB	400	1260	
	BZ405763	Base Cabinet H2 Open On Both Sides 500-BB open on both sides 1 storage shelf Dimension: 436 x 1249 x 430 mm	TO5UV-H2-126-BB	500	1260	
	BZ405764	Base Cabinet H2 Open On Both Sides 600-BB open on both sides 1 storage shelf Dimension: 536 x 1249 x 430 mm	TO6UV-H2-126-BB	600	1260	
	BZ405765	Base Cabinet H2 Open On Both Sides 700-BB open on both sides 1 storage shelf Dimension: 636 x 1249 x 430 mm	TO7UV-H2-126-BB	700	1260	
	BZ405766	Base Cabinet H2 Open On Both Sides 800-BB open on both sides 1 storage shelf Dimension: 736 x 1249 x 430 mm	TO8UV-H2-126-BB	800	1260	
	BZ405767	Base Cabinet H2 Open On Both Sides 900-BB open on both sides 1 storage shelf Dimension: 836 x 1249 x 430 mm	T09UV-H2-126-BB	900	1260	
	BZ405768	Base Cabinet H2 Open On Both Sides 1000-BB open on both sides 1 storage shelf Dimension: 936 x 1249 x 430 mm	TO10UV-H2-126-BB	1000	1260	
	BZ405769	Base Cabinet H2 Open On Both Sides 1100-BB open on both sides 1 storage shelf Dimension: 1036 x 1249 x 430 mm	TO11UV-H2-126-BB	1100	1260	
	BZ405770	Base Cabinet H2 Open On Both Sides 1200-BB open on both sides 1 storage shelf Dimension: 1136 x 1249 x 430 mm	TO12UV-H2-126-BB	1200	1260	




Hygienic design H2 Standard	ltem code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2 with folding door closed on three sides all cabinets are equipped with one shelf	735			
	BZ405780	Hygiene Base Cabinet H2 With Folding Door 400L 1 storage shelf Door hinged on the left Dimension: 336 x 724 x 430 mm	TF4UV-H2-73-EB-L	400	735	
	BZ405781	Hygiene Base Cabinet H2 With Folding Door 400R 1 storage shelf Door hinged on the left Dimension: 336 x 724 x 430 mm	TF4UV-H2-73-EB-R	400	735	
	BZ405782	Hygiene Base Cabinet H2 With Folding Door 500 L 1 storage shelf Door hinged on the left Dimension: 436 x 724 x 430 mm	TF5UV-H2-73-EB-L	500	735	
	BZ405783	Hygiene Base Cabinet H2 With Folding Door 500R 1 storage shelf Door hinged on the right Dimension: 436 x 724 x 430 mm	TF5UV-H2-73-EB-R	500	735	
	BZ405784	Hygiene Base Cabinet H2 With Folding Door 600L 1 storage shelf Door hinged on the right Dimension: 536 x 724 x 430 mm	TF6UV-H2-73-EB-L	600	735	
	BZ405785	Hygiene Base Cabinet H2 With Folding Door 600R 1 storage shelf Door hinged on the right Dimension: 536 x 724 x 430 mm	TF6UV-H2-73-EB-R	600	735	
	BZ405786	Hygiene Base Cabinet H2 With Folding Doors 800L/R 1 storage shelf Door hinged on the left and right Dimension: 736 x 724 x 430 mm	T2F8UV-H2-73-EB-L/R	800	735	
	BZ405787	Hygiene Base Cabinet H2 With Folding Doors 1000L/R 1 storage shelf Door hinged on the left and right Dimension: 936 x 724 x 430 mm	T2F10UV-H2-73-EB-L/R	1000	735	
	BZ405788	Hygiene Base Cabinet H2 With Folding Doors 1200L/R 1 storage shelf Door hinged on the left and right Dimension: 1136 x 724 x 430 mm	T2F12UV-H2-73-EB-L/R	1200	735	
		Typ: -R = hinged right / -L = hinged left				



Base Cabinets "Hygiene-H2"

Hygienic design H2 Standa	ard height 510 mm Item code	Description	Model	Length mm	Depth mm	Price €
		Hygiene base cabinets H2 with folding door closed on three sides	735			
		Hygiene base cabinet H2 for Deep Fat Fryers <u>Drop-in unit</u>				
	BZ404938	Base Cabinet H2 For Deep Fat Fryer 400L For drop-in unit, Single pan Door hinged on the left	SFFP-U51-H2-76-1B-L	400	735	
	BZ404939	Base Cabinet H2 For Deep Fat Fryer 400 R For drop-in unit, Single pan Door hinged on the right	SFFP-U51-H2-76-1B-R	400	735	
	BZ404940	Base Cabinet H2 For Deep Fat Fryer 600 L For drop-in unit, Single pan Door hinged on the left	SFFP-U51-H2-76-2B-L	600	735	
	BZ404941	Base Cabinet H2 For Deep Fat Fryer 600 R For drop-in unit, Single pan Door hinged on the right	SFFP-U51-H2-76-2B-R	600	735	
		Hygiene base cabinets H2 for PALUX Fry Star Deep Fat	<u>Fryers</u>			
	BZ400954	Base Cabinet H2 For Deep Fat Fryer 300L For drop-in fryer Fry Star, Single pan for type AE Door hinged on the left	SFFP-U51-H2-76-1B-L	300	735	
	BZ400955	Base Cabinet H2 For Deep Fat Fryer 300 R For drop-in fryer Fry Star, Single pan for type AE	SFFP-U51-H2-76-1B-R	300	735	
	BZ400956	Door hinged on the right Base Cabinet H2 For Deep Fat Fryer 400 L For drop-in fryer Fry Star, Single pan for type BE Door hinged on the left	SFFP-U51-H2-76-2B-L	400	735	
	BZ400957	Base Cabinet H2 For Deep Fat Fryer 400 R For drop-in fryer Fry Star, Single pan for type BE Door hinged on the right	SFFP-U51-H2-76-2B-R	400	735	
	BZ400958	Base Cabinet H2 For Deep Fat Fryer 500 L For drop-in fryer Fry Star, 1/2 single pan for type CE/ DE Door hinged on the left	SFFP-U51-H2-76-2B-L	500	735	
	BZ400959	Base Cabinet H2 For Deep Fat Fryer 500 R For drop-in fryer Fry Star, 1/2 single pan for type CE/ DE Door hinged on the right	SFFP-U51-H2-76-2B-R	500	735	
		Hygiene base cabinets H2 for Pasta cooker				
	BZ404926	Base Cabinet H2 With Folding Door 400 L For Pasta Cooker GN 1/1	SFP4-U51-H2-L-76-EB	400	735	
	BZ404927	Base Cabinet H2 With Folding Door 400 R Door hinged on the right	SFP4-U51-H2-R-76-EB	400	735	
	BZ404928	Base Cabinet H2 With Folding Door 600 L For Pasta Cooker GN 1/1 with lifting baskets Door hinged on the left	SFP4-U51-H2-L-76-EB	600	735	





Base Cabinets "Hygiene-H2"

Base Cabinets "Hygiene-F Hygienic design H2 Standar		Description	Model	Length mm	Depth mm	Price €
	BZ404929	Base Cabinet H2 With Folding Door 600 R For Pasta Cooker GN 1/1 with lifting baskets Door hinged on the right	SFP6-U51-H2-R-76-EB	600	735	
	BZ404930	Base Cabinet H2 With Folding Door 700 LR For Pasta Cooker GN 1/1 - Transverse installation Door hinged on the left and right	SFP7-U51-H2-LR-76-EB	700	735	
		Typ: -R = hinged right / -L = hinged left				
		Hygiene base cabinets H2 with GN supports all cabinets are equipped with 3 supports for GN 1/1	710			
	BZ405920	Base Cabinet H2 With GN Supports 400 Open on one side with 3 supports for GN 1/1 Dimension: 328 x 699 x 430 mm	NO4UV-H2-71-EB	400	710	
	BZ405921	Base Cabinet H2 With GN Supports 600 Open on one side with 3 supports for GN 2/1 Dimension: 528 x 699 x 430 mm	NO6UV-H2-71-EB	600	710	
		Base Cabinets H2 With GN Support and Folding Door one-sided all cabinets are equipped with 3 supports for GN 1/1 inner dimension: 528 x 699 x 430 mm	735			
	BZ405930	Base Cabinet H2 With GN Supports 400 L Door hinged on the left with 3 supports for GN 1/1 Dimension: 328 x 699 x 430 mm	NF4UV-H2-73-EB-L	400	735	
	BZ405931	Base Cabinet H2 With GN Supports 400 R Door hinged on the right with 3 supports for GN 1/1 Dimension: 328 x 699 x 430 mm	NF4UV-H2-73-EB-R	400	735	
	BZ405932	Base Cabinet H2 With GN Supports 600 L Door hinged on the left with 3 supports for GN 1/1 Dimension: 528 x 699 x 430 mm	NF6UV-H2-73-EB-L	600	735	
	BZ405933	Base Cabinet H2 With GN Supports 600 R Door hinged on the right with 3 supports for GN 1/1 Dimension: 528 x 699 x 430 mm	NF6UV-H2-73-EB-R	600	735	





Base Cabinets "Hygiene-H2"

Hygienic design H2 Standard height 510 mm Description Item code Model Length Depth Price mm mm € Hygiene Base Cabinets H2 With 2 Drawers 735 All Drawers are equipped with full pull-out frames Possibility to use GN-Containers BZ405940 Hygiene Base Cabinet H2 With 2 Drawers 400 2S4UV-H2-73-EB 400 735 2 drawers for GN 1/1, drawer deepth 150 mm BZ405941 Hygiene Base Cabinet H2 With 2 Drawers 600 2S6UV-H2-73-EB 600 735 Open on one side, for Holdomat 3 x GN 1/1 Hygiene Base Cabinets H2 For Holdomat 710 BZ405950 Hygiene Base Cabinet H2 For Holdomat 500 HO5UV-H2-71-EB 500 710 Dimension: 447 x 710 x 350 mm open on one side, for Holdomat Standard 311, KTM 311, Householdt 323 cut out for plug included


see page





21


Valid from 01.02.2023 51


>> socket

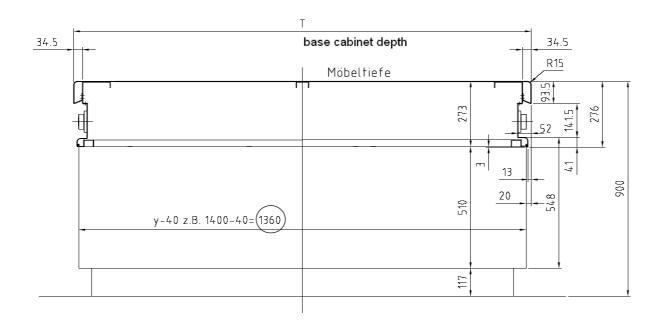


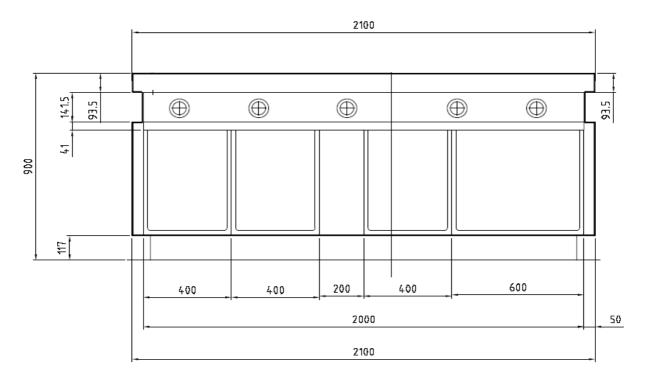


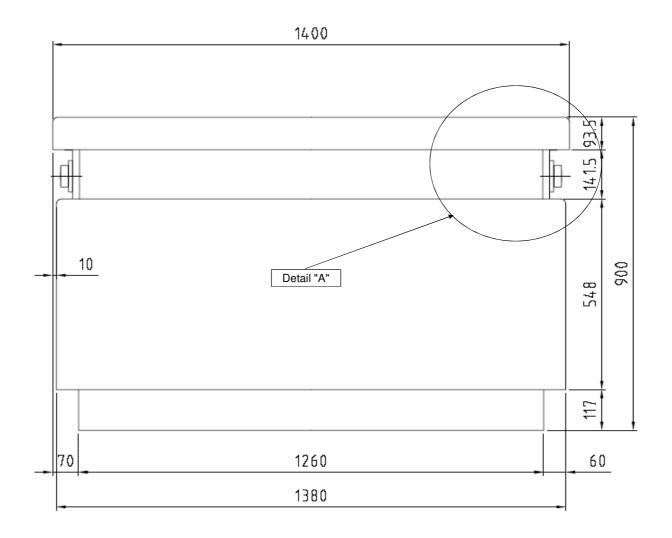




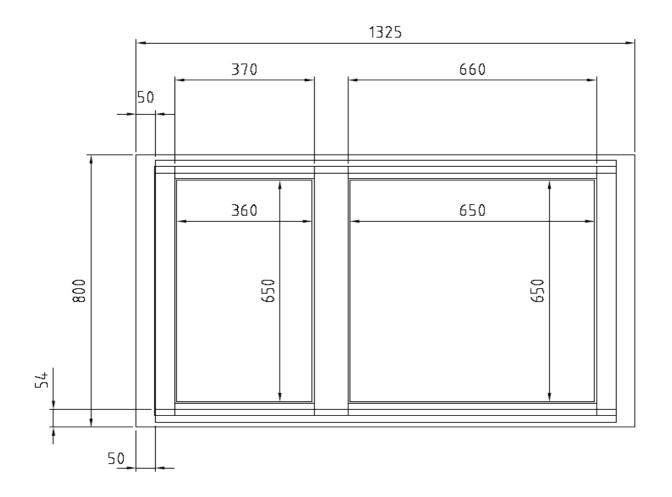

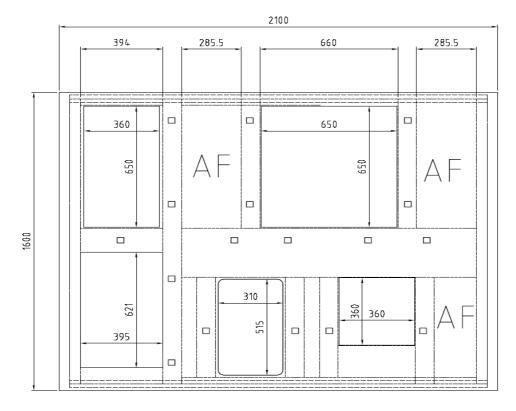

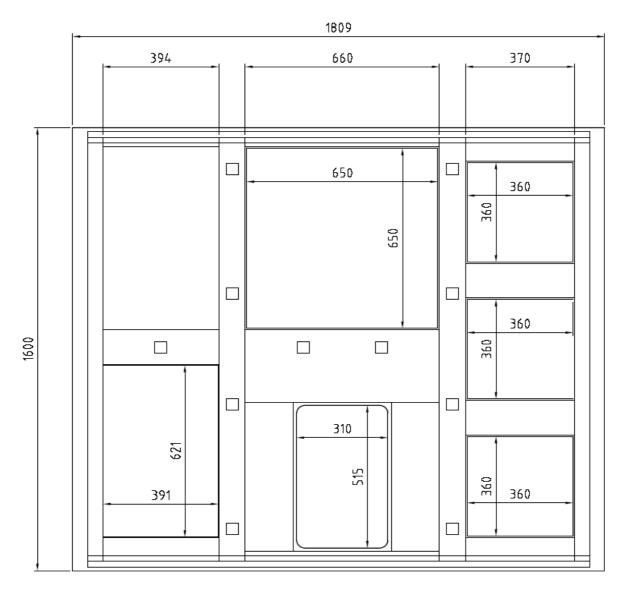

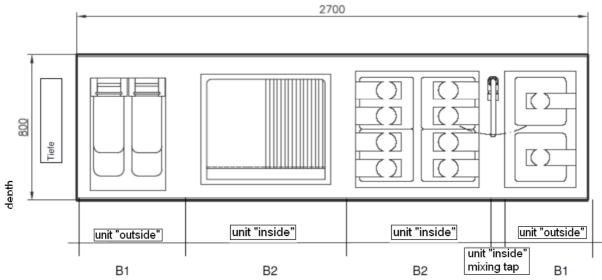









PALUX Aktiengesellschaft Wilhelm-Frank-Straße 36 97980 Bad Mergentheim GERMANY

Tel.: +49 (0) 7931 / 55 0 Fax: +49 (0) 7931 / 55 88 0 Internet: www.palux.de

E-Mail: info@palux.de



Art. No. 884432