



SF/60 P

Professional Dough Sheeters Machine for
Pastry and Bakery



EXTERNAL CONSTRUCTION

- ☐ Base structure in painted stainless steel
- ☐ Shoulders in aluminium fusion
- ☐ Belt conveyer with changeable speed in the two driving directions
- ☐ Extractable belt conveyers holder
- ☐ Safety devices in stainless steel
- ☐ Ergonomic handle to choice dough thickness
- ☐ Hand and foot lever to inverse the driving direction
- ☐ Sheet of pastry collector in stainless steel
- ☐ Machine on wheels

INTERNAL CONSTRUCTION

- ☐ Dough rollers diameter 60mm
- ☐ Chain drive
- ☐ Disassembly scrapers for rolling cylinders
- ☐ Electrical system with low-voltage auxiliary circuits
- ☐ End run connected to safety devices

FUNCTIONING

- ☐ The dough rollers extend any type dough pastry even very thin thickness
- ☐ The belt conveyers with changeable speed suitable to avoid wrinkledness
- ☐ Raiseble surfaces for overall sizes reducing at rest time

STANDARD EQUIPMENT

- ☐ Rolling pins to rolling up the dough after rolling-mill process
- ☐ Flour-holder basin

OPTIONS AND ACCESSORIES

(with surcharge)

- ☐ Croissants cutter
- ☐ Electric motor 2 speeds
- ☐ Monophasic electric motor 1 speed
- ☐ Belt conveyers – measure (600x710)mm
- ☐ Belt conveyers – measure (600x950)mm
- ☐ Belt conveyers – measure (600x1400)mm
- ☐ Belt conveyers – measure (600x1500)mm

TECHNICAL SHEET SF/60 P



MORETTI FORNI S.P.A.

www.morettiforni.com


info@morettiforni.com

Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA

Tel. +39.0721.96161 - Fax +39.0721.9616299



SF/60 P

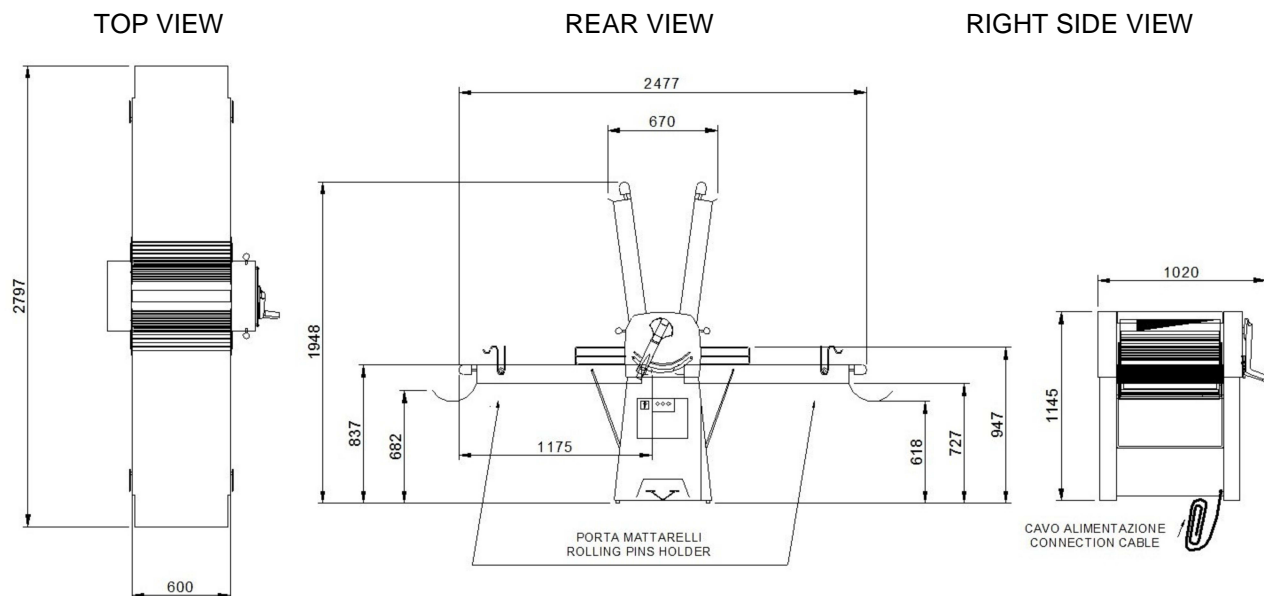

Note: The dimensions indicated in the views are in millimeters

SPECIFICATIONS

Dough sheeters very compact on purpose studied for small spaces. It is equipped of belt conveyers with two speeds in the two driving directions. Easy to use by mean of front control panel. The machine give possibility to obtain different thickness of dough, from 3,5cm to few millimetres, thanks the accurate regulation of the rollers. Raiseble surfaces for overall sizes reducing. The machine is on rotating wheels and has adjustable foots for stability during operation.

The data under indicated are referred to the open machine

DIMENSIONS

Ext height	1145mm
Ext depth	1020mm
Ext width	2797mm
Weight	215kg

SHIPMENT INFORMATION

Packed machinery:	
Max height	1540mm
Max depth	1070mm
Max width	875mm
Weight	(215+10)kg

FEEDING AND POWER

Standard feeding	
A.C. V400 3	
Feeding on request	
A.C. V230 3	
Frequency	50Hz
Power	0,75kW

MACHINE CAPACITY

Belt conveyer	(1175x600)mm
Cylinders diameter	60mm
Max cylinder range	35mm

Cable equipped	
Type	4x1,5mm ²
Length	3500mm